

11-20-00

PATENT APPLICATION TRANSMITTAL LETTER
(Large Entity)

A

Docket No.
NORT0070US(12011RRUS02U)

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Peter A. Barany, Chandra Sekbar Bontu, and Shamim Akbar Rahman

For: **Communicating Traffic Over a Wireless Channel in a Mobile Communications System**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. **EL669041244US**
- ☒ 14 sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: **Recordation Form Cover Sheet and Assignment**

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	48	- 20 =	28	x \$18.00	\$504.00
Indep. Claims	6	- 3 =	3	x \$80.00	\$240.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
TOTAL FILING FEE					\$1,454.00

- ☒ A check in the amount of **\$1,454.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **20-1504** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 11/17/00

Signature

Dan C. Hu, Reg. No. 40,025
Trop, Pruner & Hu, P.C.
8554 Katy Freeway, Suite 100
Houston, TX 77024
(713) 468-8880 [Ph]
(713) 468-8883 [Fax]



21906

PATENT TRADEMARK OFFICE

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: COMMUNICATING TRAFFIC OVER A
WIRELESS CHANNEL IN A MOBILE
COMMUNICATIONS SYSTEM

APPLICANTS: PETER A. BARANY, CHANDRA SEKHAR
BONTU, AND SHAMIM AKBAR RAHMAN

Express Mail No.: EL669041244US

Date: November 17, 2000

COMMUNICATING TRAFFIC OVER A WIRELESS
CHANNEL IN A MOBILE COMMUNICATIONS SYSTEM

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Application Serial No. 60/175,329, entitled "GSM/EDGE Radio Access Network (GERAN) Real-Time Fast Associated Control Channel (RTFACCH)," filed January 10, 2000.

TECHNICAL FIELD

The invention relates to communicating traffic in a mobile communications system.

BACKGROUND

Mobile communications systems, such as cellular or personal communications services (PCS) systems, are made up of a plurality of cells. Each cell provides a radio communications center in which a mobile station establishes a call with another mobile station or wireline unit connected to a public switched telephone network (PSTN). Each cell includes a radio base station, with each base station connected to a base station controller or mobile switching center that controls processing of calls between or among mobile stations or mobile stations and PSTN units.

Various wireless protocols exist for defining communications in a mobile network. One such protocol is a time-division multiple access (TDMA) protocol, such as the TIA/EIA-136 standard provided by the Telecommunications Industry Association (TIA). With TIA/EIA-136 TDMA, each channel carries a frame that is divided into six time slots to support multiple (3 or 6) mobile stations per channel. Other TDMA-based systems include Global System for Mobile (GSM) communications systems, which use a TDMA frame divided into eight time slots (or burst periods).

Traditional speech-oriented wireless systems, such as the TIA/EIA-136 and GSM TDMA systems, utilize circuit-switched connection paths in which a channel portion is occupied for the duration of the connection between a mobile station and the mobile

switching center. Such a connection is optimum for communications that are relatively continuous, such as speech. However, data networks such as local area networks (LANs), wide area networks (WANs), and the Internet use packet-switched connections, in which communication between nodes on a communications link is by data packets.

- 5 Each node occupies the communications link only for as long as the node needs to send or receive data packets. Popular forms of communications over packet-switched networks include electronic mail, web browsing, text chat sessions, file downloads, and other types of data transfers.

10 Several packet-switched wireless connection protocols have been proposed to provide more efficient connections between a mobile station and a data network. One such protocol is the General Packet Radio Service (GPRS) protocol, which complements existing GSM systems. Another technology that builds upon GPRS is the Enhanced Data Rate for Global Evolution (EDGE) technology, which offers even higher data rates. The enhancement of GPRS by EDGE is referred to as Enhanced GPRS (EGPRS). Another variation of EGPRS is the COMPACT technology. GPRS, EGPRS, and COMPACT are established by the European Telecommunications Standards Institute (ETSI).

15 The packet-switched wireless connection protocols provide efficient access to data networks, such as the Internet, LANs, WANs, and the like. A growing use of such data networks is for voice and other forms of real-time or streaming communications (such as video, audio and video, multimedia, and so forth). Various protocols have been defined to enable such real-time or streaming communications over the data networks, with one popular type of packet-switched network being the Internet Protocol (IP) network.

20 In some wireless communication systems, mobile stations are able to enter into a discontinuous transmission (DTX) mode. When a mobile station is not transmitting, such as when a user is not talking, and there is no other traffic to communicate, the mobile station can enter into DTX mode to save power and also to reduce interference with other mobile stations. During DTX, a channel between the mobile station and the base station is idle (that is, no traffic is being communicated). However, other mobile stations do not have access to the idle channel, since the channel is dedicated to the voice user. This is to ensure that the voice user can quickly start communicating over the channel once the user

resumes talking. As a result, available bandwidth is wasted in some mobile communications systems.

SUMMARY

5 In general, according to one embodiment, a method of communicating in a mobile communications system comprises detecting that a first mobile station has stopped transmitting traffic containing real-time, interactive data on a first channel portion. Traffic from a second mobile station is multiplexed on the first channel portion during a period in which the first mobile station is not transmitting traffic.

10 Some embodiments of the invention may have one or more of the following advantages. Bandwidth of channel portions in a wireless communications system is increased by multiplexing traffic from another mobile station when a first mobile station has stopped transmitting real-time, interactive traffic (e.g., voice), such as during discontinuous transmission (DTX) mode. A reliable mechanism is provided to ensure
15 that the first mobile station can quickly gain access back to the channel portion if the first mobile station starts transmitting again. This may be particularly useful when the traffic communicated by the first mobile station includes voice or other forms of real-time, interactive data.

20 Other features and advantages will become apparent from the following description, from the drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of an embodiment of a mobile communications system.

25 Fig. 2 illustrates multiplexing of traffic transmitted by first and second mobile stations, in accordance with an embodiment.

Fig. 3 is a message flow diagram of messages exchanged between, and actions performed by, a mobile station and a base station, in accordance with one embodiment.

Figs. 4A-4B are a block diagram of components of the communications system of Fig. 1.

Fig. 5 illustrates a message transmitted by a first mobile station after exiting discontinuous transmission (DTX) mode to request allocation of the traffic channel portion that has been allocated to a second mobile station.

Fig. 6 illustrates an uplink assignment message to assign the channel portion back to the first mobile station.

Fig. 7 is the flow diagram of a process performed by a base station, in accordance with an embodiment.

Figs. 8A-8B and 9A-9B illustrate multiframes for carrying traffic and control signaling between the mobile station and the base station.

Fig. 10 illustrates the communications of a resource request message at different times and the communications of the responsive uplink assignment messages, in accordance with an embodiment.

Fig. 11 is a block diagram of a circuit to detect for the resource request message, in accordance with one embodiment.

DETAILED DESCRIPTION

In the following description, numerous details are set forth to provide an understanding of the present invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these details and that numerous variations or modifications from the described embodiments may be possible. For example, although reference is made to General Packet Radio Service (GPRS) systems in described embodiments, other types of wireless systems that enable packet-switched communications by a base station may be employed in other embodiments.

Referring to Fig. 1, a mobile communication system 10, which may be a cellular or a personal communications services (PCS) system, includes a radio access network (RAN) 11 that includes base stations 12 having transceivers to transmit and receive radio frequency (RF) signals. The base stations 12 are coupled to a system controller 50, with each base station controlling communications with mobile stations in respective cells, cell sectors, or other cells segments. Examples of mobile stations that can communicate with the RAN 11 over RF channels include mobile telephones, mobile computers, personal digital assistants (PDAs), and other types of mobile stations.

In one embodiment, the radio access network 11 is an EGPRS (Enhanced GPRS or General Packet Radio Service) network that is able to support packet-switched data services. Alternatively, the radio access network may be a GPRS or a COMPACT network, or other types of wireless networks that are capable of supporting packet-switched data services, including a code-division multiple access (CDMA) network. The GPRS, EGPRS, and COMPACT protocols are set by the European Telecommunications Standards Institute (ETSI). As used here, reference to a "GPRS system" or "GPRS network," refers to any one of the GPRS, EGPRS, and COMPACT systems or networks.

In the GPRS network 11, the system controller 50 is a serving GPRS support node (SGSN), which is connected to the base station 12 over an Iu-ps interface. The SGSN 50 is also coupled to a gateway GPRS support node (GGSN) 52 over a Gn interface, which forms the gateway between the radio access network 11 and a packet-based data network 54, such as the Internet. Various network devices (not shown), such as a network telephone, a computer system, an Internet appliance, and so forth, are coupled to the packet data network 54. Some of the network devices are capable in participating in a real-time, interactive call session (e.g., a voice session, video conferencing session) with a mobile station through the radio access network 11. In addition, the packet data network 54 may be coupled through a gateway system 56 to a public switched telephone network (PSTN) 58, which is coupled to wireline telephones. Each mobile station is also capable of participating in a voice call session with the wireline telephone through the radio access network 11, packet data network 54, gateway system 56, and PSTN 58.

A "real-time, interactive" communications session refers to an exchange of data, such as audio and/or video data, on a substantially real-time basis between two terminals. A session is substantially real-time if interaction is occurring between two endpoints or parties, with a communication from one end point followed relatively quickly by a response or another communication from the other endpoint, typically within seconds, for example. Any substantial delay in the transmission of frames or packets carrying information associated with real-time, interactive communications may result in perceived degradation of the quality of the communications or in the reliability of the communications.

One type of packet-switched communications includes communications according to the Internet Protocol (IP). One version of IP is described in Request for Comments (RFC) 791, entitled "Internet Protocol," dated September 1981; and another version of IP is described in RFC 2460, entitled "Internet Protocol, Version 6 (IP v6 Specification)", dated December 1998. Packet-switched networks such as IP networks communicate with packets, datagrams, or other units of data over networks. Unlike circuit-switched networks, which provide a dedicated end-to-end connection or physical path for the duration of a communications session, a packet-switched network is based on a connectionless, internetwork layer. Routing of packets is based on destination addresses carried in the packets. The packets may be transmitted along different paths, and thus, may arrive at a destination in an order that is different than the transmission order. The destination terminal reassembles the received packets.

As shown in Fig. 1, mobile stations 34 and 40 are performing voice communications. In the example, the voice communications is referred to as VoIPoEGPRS (voice over IP over EGPRS), which refers to voice carried in IP packets that are in turn carried in EGPRS frames between the mobile stations and the radio access network 11. Instead of voice, the mobile stations 34 and 40 are also capable of communicating other types of real-time, interactive data, such as video data, multimedia data, and so forth.

The mobile stations 34 and 40 associated with voice or other real-time, interactive users, communicate with the radio access network 11 over wireless channels 18, 20, 22, 24, 26, 28, 30, and 32. The other mobile stations in the illustrated example include mobile stations 36 that are receiving electronic mail, mobile stations 38 that are transmitting electronic mail, and mobile stations 42 that are performing web browsing communications. Channels 14 and 16 are indicated as being available for other users.

As used here, a "channel portion" or "wireless channel portion" refers to a time slot of a frame transmitted on a given channel having a predetermined frequency. In a TDMA system such as an EGPRS system, each frame is divided into multiple time slots (e.g., 8 in the EGPRS system). For full-rate users, each time slot is allocated to carry bearer traffic of a mobile station. For half-rate users, each time slot is allocated to carry bearer traffic of two mobile stations. In other embodiments, the channel portion can be a

portion of another type of channel, such as a channel in a code-divisional multiple access (CDMA) system.

To enhance the bandwidth for communications with the various mobile stations in the radio access network 11, multiplexing of traffic is performed when the mobile stations 34 and 40 (associated with voice or other real-time, interactive data users) are in discontinuous transmission (DTX) mode and thus not transmitting traffic. When that occurs, the radio access network 11 allocates the channel portion that is used by the voice user mobile station (currently in DTX mode) to another mobile station, such as one of mobile stations 36, 38, and 42 (which are communicating packet traffic) or to another mobile station that is communicating real-time, interactive data or streaming data.

On the downlink path, multiplexing of plural mobile stations, even if one is a voice user, is relatively simple to implement since the base station is aware of the traffic that needs to be transmitted downlink. However, in the uplink path, to provide adequate performance, a mechanism in accordance with some embodiments is provided to enable the voice user mobile station to request the channel portion that has been relinquished to another mobile station while the voice user mobile station is in DTX mode. The time between the request and the re-allocation of the channel portion is relatively small to ensure that voice traffic is not substantially delayed. The mechanism to enable the request and assignment of a channel portion for a mobile station exiting DTX mode includes a Real-Time Fast Associated Control Channel (RTFACCH), as further described below.

Thus, using the RTFACCH mechanism, an on-demand feature is provided to the voice user mobile station for requesting re-allocation of a channel portion (e.g., time slot) that has been allocated to another mobile station during DTX mode of the voice user mobile station. The request for re-allocation can be transmitted in any frame (with certain exceptions) after the voice user mobile station detects that it has exited DTX mode. Thus, the voice user mobile station does not need to wait for a pre-assigned frame or block before it can send some indication that it has exited DTX mode and is ready to start communicating traffic again. Typically, allocation of blocks for communication of traffic is performed using either USF (Uplink State Flag), which is transmitted on the downlink path, or in an RRBP (Relative Reserved Block Period) field, also transmitted

on the downlink path. In fact, the voice user mobile station can transmit the request for re-allocation of the time slot during a period in which the other mobile station is transmitting traffic. As a result, mechanisms according to some embodiments are provided to detect the request despite the collision with traffic from the other mobile station on the same time slot (or channel portion).

In one embodiment, the radio access bearers of the GPRS network 11 include four different traffic classes (e.g., quality of service or QoS classes), including conversational traffic class, streaming traffic class, interactive traffic class, and background traffic class. The main factor that distinguishes these traffic classes from each other is how sensitive to delay they are. For example, the conversational traffic class includes traffic that is the most sensitive to delay, while the background traffic class includes traffic that is least sensitive to delay. Conversational and streaming traffic classes are primarily intended to be used for real-time traffic flows. The conversational traffic class includes real-time, interactive traffic, such as Internet telephony, while the streaming traffic class includes real-time traffic, such as transmissions of audio, video, or multimedia files that are being downloaded from a website to a terminal. Interactive and background traffic classes are primarily intended for use with non-real-time traffic flows, and include traffic flows associated with electronic mail, web browsing, file transfers, and so forth.

In the example of Fig. 1, mobile stations 34 and 40 are communicating traffic that are in the conversational traffic class, while mobile stations 36, 38, and 42 are communicating traffic that are in the interactive or background traffic class.

Referring to Fig. 2, multiplexing of traffic data from two mobile stations 100 and 102 on the same channel portion is illustrated. In one example, the mobile station 100 is communicating conversational class traffic, while the mobile station 102 is communicating interactive or background class traffic. However, in other examples, the mobile stations 100 and 102 may communicate other types of traffic.

As shown in Fig. 2, the mobile station 100 is communicating voice data with periods of silence (104, 106, and 108) corresponding to DTX mode of the mobile station 100 during which the user of the mobile station 100 is not speaking. During the silent periods 104, 106, and 108, data (represented as 110, 112, and 114) from mobile station 102 may be multiplexed onto the channel portion by a statistical multiplexer 116 that is

part of the radio access network 11. The combined flow of the multiplexed traffic from the mobile stations 100 and 102 are outputted by the statistical multiplexer 116.

As noted above, in an EGPRS system, each channel portion that is used to carry traffic from a mobile station includes one of eight time slots in a frame. In the case of the full-rate voice user (or other conversational traffic class user), the time slot is a dedicated time slot that is typically not shared with other mobile stations. This is because conversational traffic class users are more sensitive to delays. For half-rate users, each time slot is allocated to two mobile stations, but again, sharing is typically not performed during the allocated portions of the time slot for each mobile station. However, a substantial portion of the time slot allocated to a conversational class traffic mobile station is not used during DTX mode. To take advantage of this unused bandwidth, traffic from other mobile stations, such as the mobile station 102, can be multiplexed into the silent periods 104, 106, and 108. For optimal performance, the traffic that is multiplexed into the DTX periods includes traffic that is not sensitive to delays, such as traffic in the background or interactive traffic class. However, if delays associated with the multiplexing are not too excessive, multiplexing of voice traffic data between two conversational traffic class users may also be performed, in some embodiments.

Referring to Fig. 3, the process by which multiplexing of traffic from two mobile stations is enabled for a channel portion (referred to as “channel portion Y”) in the uplink path (from the mobile station to the base station 12) and subsequent allocation of the channel portion back to the mobile station is illustrated. The mobile station (“mobile station A”) sends speech frames (at 302) associated with a user (“user A”) to the base station 12 on channel portion Y. In one embodiment, the communication of speech frames occurs during talkspurt mode. When the mobile station detects (at 304) that user A has stopped talking, the mobile station enters (at 306) DTX mode. When it enters DTX mode, the mobile station sends (at 308) a message indicating that DTX mode is starting or has started. In one embodiment, the message is a SID_FIRST frame, which is a marker to define the end of speech and the start of DTX mode. When the base station 12 receives the SID_FIRST frame, the base station 12 assigns (at 310) channel portion Y to another mobile station (“mobile station B”). At this point, mobile station A is silent while mobile station B is transmitting on the uplink channel portion Y.

During DTX mode, mobile station A keeps its uplink TFI (temporary flow identifier) of a TBF (temporary block flow). Normally, the TFI is used to identify one of multiple users on the same channel portion (for interactive or background class traffic, for example). Under EGPRS, the TFI is a 5-bit value, thus enabling up to 32 users on the same channel portion. Although mobile station A maintains its TFI value, radio resources of channel portion Y can be allocated to another mobile station. Also, the packet timing advance control channel (PTCCH) that is assigned to mobile station A can be relinquished to the other user.

However, although radio resources have generally been relinquished to mobile station B during DTX mode of mobile station A, control messages for maintenance purposes are still needed for mobile station A. For that reason, such control messages are communicated at set periods in the uplink path. The control messages include the SID_UPDATE message, which is used to communicate comfort noise parameters. Also, during the set periods, mobile station A can transmit PTCCH (packet timing advance control channel) to maintain time alignment; PACCH (packet associated control channel) to transmit control messages such as a channel quality message that includes parameters for link adaptation; RTCP (Real-Time Protocol Control Protocol) messages to provide feedback on the quality of real-time data communicated in the downlink path; and RSVP (Resource ReserVation Protocol) Time Values objects to refresh the QoS path in the network. RTP is described in RFC 1889, entitled "RTP: A Transport Protocol for Real-Time Applications," dated January 1996; and RSVP is described in RFC 2205, entitled "Resource ReSerVation Protocol: Version 1 Functional Specification," dated September 1997.

At a later point in time, mobile station A detects (at 312) that user A has started talking again. As a result, mobile station A sends (at 314) an indication to the base station 12 that mobile station A again needs channel portion Y. In one embodiment, the message is in the form of an RTFACCH resource request message (RTRRM) sent by mobile station A to the base station 12. RTFACCH can also be used to carry an uplink assignment message (RTUAM), which is transmitted by the base station 12 (at 316) in response to RTRRM to assign uplink radio resources to mobile station A. Upon receipt of the RTUAM, mobile station A enters into talkspurt mode and again transmits (at 318)

speech frames on channel portion Y. Mobile station B is either put into a queue or reassigned another channel.

Referring to Figs. 4A-4B, some of the components of the mobile communications system 10 of Fig. 1 are illustrated in greater detail. A mobile station 200 communicates over a wireless link with a base station 202, which has an Iu-ps interface 236 that is coupled to the SGSN 50. The mobile station 200 includes an RF transceiver 227 that is connected to an RF antenna 228. The mobile station 200 also includes an RLC/MAC (radio link control/medium access control) layer 225. The RLC module provides a radio-solution-dependent reliable link, and the MAC module controls the access signaling (request and grant) procedures for the radio channel.

The RLC/MAC layer 225 also includes a transmit DTX (TX DTX) handler 220 that passes traffic frames to a TX RSS (transmit radio subsystem) 222 in the transceiver 227. Each frame passed to the TX RSS 222 includes bit fields containing the information bits, the audio coder/decoder (CODEC) mode indication, and a TX_TYPE identifier to identify the content of the frame. The TX_TYPE identifier can specify that the frame contains speech; SID_FIRST to mark the end of speech; SID_UPDATE to provide comfort noise parameters; ONSET to indicate that the beginning of a speech burst is about to begin; NO DATA to indicate that the frame contains no useful data and should not be transmitted over the air interface; and other information. The transceiver 227 also includes an RRM generator 223 for generating RTRRM messages. As will be discussed further below, an RTRRM message is a coded version of the TFI associated with the mobile station. The RRM generator 223 performs the coding in accordance with some embodiments.

The TX DTX handler 220 includes a voice activity detector to assess whether input signals contain speech or not. If there is no speech, then the TX DTX handler 220 sends an indication to the TX RSS 222 to enter DTX mode by setting the flag TX_TYPE to the value corresponding to SID_FIRST. When the TX RSS 222 receives a SID_FIRST frame, radio transmission from the TX RSS 222 is cut off. The TX DTX handler 220 receives audio data from an audio CODEC 270, which is coupled to an analog-to-digital (A/D) and digital-to-analog (D/A) converter 272 that outputs audio data to a speaker 274 and receives input audio from a microphone 276.

During DTX mode, the TX RSS 222 is resumed at regular intervals for transmission of SID_UPDATE frames to communicate comfort noise parameters calculated in the TX DTX handler 220. The TX RSS 222 includes a channel encoder to encode information to be communicated over the air link.

Frames received over the air are passed by the transceiver 227 up through the RLC/MAC layer 225 and upper layers (not shown). Received control messages are processed by the upper layers or by one or more software routines 212. Received speech messages are passed to the audio CODEC 270 for output on the speaker 274.

The statistical multiplexer 116 (Fig. 2) can be implemented in one or more layers of the base station 200 (e.g., the transceiver 227, RLC/MAC layer 225, and higher layers).

In one configuration, radio access bearer 0 (RAB0) is used, in which the RTP/UDP/IP (Real-Time Protocol/User Datagram Protocol/Internet Protocol) header of each speech frame is removed in the radio access network 11 on the downlink path before transmission to the mobile station. The RTP/UDP/IP header is then reconstructed by the mobile station. On the uplink path, the RTP/UDP/IP header is removed by the mobile station and then reconstructed in the radio access network 11. For the radio access bearer 1 and 2 (RAB1 and RAB2) configurations, the RTP/UDP/IP header (compressed or uncompressed) is communicated to/from the mobile station and radio access network 11. To generate or process RTP/UDP/IP headers, appropriate RTP, UDP, and IP stacks (not shown) are provided in the mobile station.

The various software layers, routines or modules in the mobile station 200 are executable on a control unit 208, which is connected to a storage unit 210. The mobile station 200 also includes an input/output (I/O) interface 218, which is connected to a keyboard 214 and a display 216.

The base station 202 also includes a transceiver 253 that is coupled to an antenna tower 251 and an RLC/MAC layer 255. The transceiver 253 includes a receive radio subsystem (RX RSS) 252 for receiving frames over the air link. The RX RSS 252 is connected to a receive DTX (RX DTX) handler 250 in the RLC/MAC layer 255. The RX DTX handler 250 is responsible for the overall DTX operation on the receive side. The RX RSS 252 continuously passes received traffic frames to the RX DTX handler

250. A flag RX_TYPE is set by the RX RSS 252 to indicate how the frame is to be handled by the RX DTX handler 250. For example, the RX_TYPE flag can indicate that the received frame includes speech or that the received frame includes a SID_FIRST, SID_UPDATE, or ONSET message.

5 The base station 202 includes a radio resource management (RRM) module 237 that receives indications (SID_FIRST) that radio resources are available for statistical multiplexing because a mobile station has gone idle (e.g., DTX mode). When that occurs, the radio resources, in the form of a channel portion, are allocated to another mobile station for the uplink.

10 The base station 202 also includes a fast access module 242 to control the RTFACCH operation. The fast access module 242 detects for receipt of the RTRRM message, and in response to the RTRRM message, the fast access module 242 sends an RTUAM message to the mobile station 200 to re-assign a channel portion to the mobile station 200. The fast access module cooperates with one or more base station routines 234 to determine allocation of the channel portion. The fast access module 242 and the software routines 234 are executable on a control unit 230, which is coupled to a storage unit 234.

15 In accordance with some embodiments, decoding for presence of RTRRM on the channel portion is performed by an RTRRM detector 238 in the transceiver 253.

20 RTRRM is transmitted by the mobile station 200 during transmission of actual data traffic by another mobile station on the same channel portion. The RTRRM detector 238 is discussed in greater detail below in connection with Fig. 11.

25 Referring to Fig. 5, while mobile station 200A (400) is in DTX mode, mobile station 200B (402) is transmitting bursts 406 over the allocated channel portion (time slot TNx). To request re-assignment of the channel portion, the mobile station 200A sends the RTRRM frame 408 in the same time slot that it was assigned during its previous talkspurt mode. However, the mobile station 200A can send RTRRM on a new time slot if the radio access network 11 sends PACCH on the downlink during the silence period of mobile station 200A to indicate a new time slot and/or frequency assignment.

30 In accordance with some embodiments, the RTRRM frame 408 includes the 5-bit TFI of the mobile station 200A. Normally, the TFI is used to identify one of multiple

users on the same channel portion. In one embodiment, up to 32 users may be placed on the same time slot on the downlink and up to 7 users may be placed on the same time slot on the uplink, with the 5-bit TFI identifying one of the multiple users. In one embodiment, the 5 TFI bits are coded into 148 bits and sent over the entire burst 408, which in one embodiment is 156.25 symbols long (which corresponds to about 577 microseconds). Each information bit in the burst 408 has an information rate f_b of about 8.667 kilobits per second (kb/s). In one example, the 5 TFI bits are coded by using a maximal length sequence at a chip rate f_c equal to the EGPRS symbol rate of about 270.855 symbols per second, which results in a coding gain (CG) of 15 dB.

Each of the TFI bits is converted to one of two codes based on the state of the TFI bit. This coding is performed by the RRM generator 223 (Fig. 4A). If the TFI bit has state 0, then the bit is converted to the following 31-bit maximal length (ML) sequence:

Code-0 = 11110 11100 01010 11010 00011 00100 1.

If the TFI bit has state 1, then the bit is converted to the following ML sequence:

Code-1 = 11110 11001 11000 01101 01001 00010 1.

Since the TFI after coding results in a total of 155 bits (31×5), not 148, 7 bits are “punctured” or truncated. The punctured bits correspond to TFI bits 0 and 4; as a result, TFI bits 0 and 4 get less coding gain compared to the remaining TFI bits. In other embodiments, other coding schemes may be selected to achieve a more uniform coding gain for all five bits of TFI. In alternative embodiments, other codes can be used. Also, alternatively, instead of two codes, a single code can be used, with the states of the bits flipped to represent “0” and “1” states.

By using an RTRRM that is one burst in length, a relatively fast mechanism is enabled for re-assignment of the requested time slot back to the mobile station 200A. Also, to ensure reliable detection, RTRRM is transmitted at relatively high power, up to the maximum power permitted for the mobile station 200A. The transmission of the RTRRM burst 408 overlaps and coincides with the data traffic bursts 406 transmitted by

the mobile station 402. To detect the presence of RTRRM despite this collision, the RTRRM detector 238 in the base station 202 uses joint detection or successive cancellation techniques, as further described below. Optionally, RTRRM may also be independently detected.

Collision between the RTRRM burst 408 and the traffic burst 406 may or may not cause the traffic burst 406 to be corrupted. If the traffic burst 406 is corrupted, then the base station 202 may request retransmission of the traffic burst 406 from the mobile station 200B. If the traffic burst 406 from the mobile station 200B contains speech data, then a speech frame substitution technique may be used to recover corrupted speech data. In one example, the speech frame substitution technique involves substituting a previously received speech frame in place of the present frame if the present frame is corrupted.

Referring to Fig. 6, one embodiment of an RTUAM burst 500 is illustrated. The RTUAM burst 500 includes a header portion 502 that identifies the burst 500 as an RTUAM. The body of the RTUAM burst 500 includes the following: <TFI>, which represents the five-bit TFI; {0 | 1 <Uplink_TFI_ASSIGNMENT>}, which is used by the radio access network 11 to assign another TFI to the mobile station exiting DTX mode so that the mobile station transmits on a different time slot and/or RF frequency; <TSC>, which represents the training sequence code used for measuring co-channel interference; <ARFCN>, which represents the radio frequency of the channel assigned to the mobile station; <TIMESLOT_ALLOCATION>, which contains the time slot assignment for the mobile station; and padding bits.

The RTUAM burst 500 is one burst in length to decrease the delay in re-assigning a time slot back to a mobile station exiting DTX mode. This is particularly important for mobile stations communicating conversational class traffic, which are the most sensitive to delay of the four possible traffic classes. To prevent collision between the RTUAM burst 500 and other data on the downlink, the base station will preempt transmission of any other data on the downlink. To improve reliability in detection of RTUAM, repetition diversity may be employed, as explained below. Also, in further embodiments, an RTUAM burst having a larger length may be employed to improve reliability.

Referring to Fig. 7, processing of various messages by the base station is illustrated. If the base station detects receipt of a robust AMR (adaptive multi-rate) traffic synchronized control channel (RATSCCH), the base station decodes the RATSCCH frame (at 604). The RATSCCH frame is used to convey RATSCCH messages and to change CODEC configurations on the radio interface. The RATSCCH frame is passed to the RX DTX handler 250 as a NO_DATA frame.

If the base station detects (at 606) receipt of a SID_FIRST frame, the frame is passed to the RX DTX handler 250 as the SID_FIRST frame (at 608). In addition, the radio resource management (RRM) module 237 is notified that uplink radio resource is now available for statistical multiplexing. The base station also begins looking for an RTRRM burst, and if an RTRRM burst is received, a responsive RTUAM burst is transmitted to the mobile station.

The base station can also detect a SID_UPDATE frame (at 610). In response, the frame is decoded and passed (at 612) to the RX DTX handler 250 as SID_UPDATE, SID_BAD or NO_DATA frame depending on the CRC (cyclic redundancy check) and the content of information bits along with comfort noise parameters. Also, the base station checks to determine if the received message is a PACCH burst, PTCCH burst, or a PDTCH (packet data traffic channel) burst (containing RTCP or RSVP signaling). The purposes of these messages are discussed above. The base station continues to monitor for the RTRRM message, and if the RTRRM burst is detected, a responsive RTUAM burst is transmitted.

The base station can also detect (at 614) an ONSET frame, which is passed (at 616) to the RX DTX handler 250 as an ONSET frame. This indicates that an RTRRM burst has been detected, that the RTUAM has been transmitted in response to the RTRRM, and the RRM module 237 has been notified that the uplink radio resource is no longer available for statistical multiplexing.

If none of the RATSCCH, SID_FIRST, SID_UPDATE, and ONSET frames are detected, then the base station decodes (at 618) the received frame as a speech frame. If the SID_FIRST frame has been previously detected with no subsequent detection of the ONSET frame, then the base station continues to monitor for the RTRRM message.

In an EGPRS system, multiframes are used to communicate control and traffic signaling between mobile stations and base stations. The multiframes can include 52 frames, with each frame containing eight time slots. A multiframe starts with frame FN0 and ends with frame FN51. Four frames make up a block. Generally, conversational traffic is interleaved over eight frames, while traffic in the other traffic classes is interleaved over four frames.

Referring to Figs. 8A-8B, according to one example, a multiframe 700 communicated in the uplink path and a multiframe 702 communicated in the downlink path are illustrated. The multiframes 700 and 702 each includes 52 frames FN0-FN51. Each frame has eight time slots TN0-7. According to one configuration, a speech frame (SF) is interleaved over eight frames. In the example shown in Figs. 8A-8B, time slot TN0 is assigned to carry speech associated with a first mobile station. Thus, as shown, speech frame 1 (SF#1) is interleaved over frame numbers FN0-7 (blocks B0 and B1). The last half of speech frame 0 (SF#0) is interleaved over frame numbers FN0-3. Speech frame 2 (SF#2) is interleaved over frame numbers 4-11 (block B1 and B2). SF#2 is the end of speech stream from the first mobile station, so that SID_FIRST (F) frames are also interleaved over the frame numbers FN8-11 (block B3). Frame FN12 is used to carry the PTCCH (Packet Timing Advanced Control Channel).

Since the first mobile station (mobile station A) has entered into DTX mode, time slot TN0 in the subsequent frames of the multiframe can be allocated to a second mobile station (mobile station B) to carry traffic transmitted by mobile station B. As shown, traffic associated with mobile station B is carried in frames FN13-20 (blocks B4 and B5). The frames carrying traffic of mobile station B are marked with "MB".

In accordance with some embodiments, even though the first mobile station is in DTX mode, it continues to transmit SID_UPDATE messages to convey comfort noise parameters. The SID_UPDATE message is interleaved over frame numbers FN21-24 (block B6). In one embodiment, the SID_UPDATE message is communicated by the mobile station in DTX mode every (N+1)th radio block, where N is set to some arbitrary value, e.g., N greater than or equal to 1. In the example illustrated in Figs. 8A-8B, N is equal to two. Also, at longer intervals, the same (N+1)th radio block may also be used for the following purposes: transmitting PTCCH information periodically; transmitting

control messaging through PACCH; transmitting RTCP packets through PDTCH; and transmitting RSVP Time Values objects through PDTCH.

After the idle frame FN25, frames FN26-33 (blocks B7 and B8) are used to carry traffic transmitted by mobile station B. Next, in frames FN34-37 (block B9), the
 5 SID_UPDATE frame is transmitted by the mobile station A. The next frame FN38 carries PTCCH information, followed by traffic from the mobile station B in frames FN39-42 (block B10). In addition, at this time, mobile station A has detected user voice traffic again and wishes to begin re-transmitting. To do so, mobile station A transmits RTRRM (represented by R) in frame FN 41 (which is also carrying traffic from the
 10 mobile station B).

Generally, according to one embodiment, RTRRM can be transmitted on any frame number of a multiframe except the following: $FN \bmod 52 = 12$ (which carries PTCCH), 25 (which is idle), 38 (which carries PTCCH), or 51 (which is idle).

In response to RTRRM in frame FN41, the base station transmits RTUAM
 15 (represented as A) in frame FN42 of multiframe 702 (on the downlink). With RTUAM, the base station has allocated time slot TN0 in the multiframe 700 back to mobile station A. After being allocated back time slot TN0, mobile station A transmits the ONSET frame in frames FN43-46 (block B11). Mobile station A also starts transmitting speech frame 0 (SF#0) after exiting DTX mode. SF#0 is interleaved over eight frames FN43-50
 20 (blocks B11 and B12). Mobile station A continues to transmit further speech frames.

On the downlink path, statistical multiplexing of traffic destined for two different mobile stations can also be performed. However, since the base station is aware of when it has entered DTX mode with one mobile station, it can easily multiplex the traffic from another mobile station during its silence period with the first mobile station. The
 25 RTFACCH mechanism discussed for the uplink path is not required to perform statistical multiplexing on the downlink path. Thus, while mobile station A is transmitting speech frames on the uplink path in frames FN0-7 (blocks B0 and B1), the base station is not transmitting data on the downlink path, and thus the base station enters DTX mode on the downlink path to mobile station A. However, the same frames can be used to
 30 communicate traffic to another mobile station (e.g., mobile station B). SID_UPDATE frames are communicated on the downlink path from the base station to mobile station A

on frames FN8-11 (block B3) of the multiframe 702. After the base station allocates time slot TN0 back to mobile station A, the base station transmits the ONSET frame in frames FN13-16 (B4), along with speech frame 0 (SF#0). Further speech frames are communicated in subsequent frames of the multiframe 702, until the speech has stopped.

At that point, in frames FN34-37 (block B9), the SID_FIRST message is transmitted downlink in frames FN34-37.

Next, the block (B10) starting at frame FN39 is used to carry traffic targeted for mobile station B since the downlink path from the base station to the first mobile station is now silent. However, the base station also detects transmission of the RTRRM message at this time (transmitted by the first mobile station in frame FN41). In response to detection of RTRRM, the base station preempts the transmission of traffic for mobile station B in frame FN42 and transmits RTUAM instead.

Figs. 8A-8B illustrate the minimum delay between when an RTRRM message is transmitted by the mobile station A after the re-establishment of uplink speech transmission by the first mobile station. In the example of Figs. 8A-8B, a one-frame delay is experienced between RTRRM and the start of speech transmission in frame FN43 in the uplink multiframe 700.

Referring to Figs. 9A-9B, a maximum delay scenario is illustrated. Figs. 9A-9B show a multiframe 800 on the uplink path and a multiframe 802 on the downlink path. The difference between the examples of Figs. 8A-8B and 9A-9B is that RTRRM is transmitted in frame FN42 in the multiframe 800 (instead of frame FN41 in the multiframe 700 of Figs. 8A-8B). Frame FN42 is the last frame of block B9. As a result, the assignment message RTUAM is not communicated until the beginning of the next block (B10) in frame FN43. As a result, the next block B10 on the uplink path is not allocated to the first mobile station (so that traffic from mobile station B continues to be transmitted in the uplink multiframe 800). It is not until block B11 of the uplink multiframe 800 that mobile station A can resume transmission of traffic in time slot TN0.

Referring to Fig. 10, the relative timing between RTRRM, RTUAM, and resumption of uplink transmission is illustrated, given different times at which RTRRM is sent. A downlink stream 900 and an uplink stream 902 of frames are illustrated. In the example of Fig. 10, time slot TN1 is the time slot used for communications by a first

mobile station (mobile station A). As shown in Fig. 10, the uplink stream is delayed with respect to the downlink stream by three time slots. The stream is divided into three blocks B_x , B_{x+1} , and B_{x+2} . Assuming that mobile station A is in the DTX mode, there are four different possible time periods within a block that the first mobile station can transmit RTRRM to request the channel back. In a first scenario, the RTRRM can be sent in the last burst (or time slot) of a block B_x (as indicated by 904). When this occurs, the RTUAM is not transmitted on the downlink (at 912) by the base station in the downlink path until the next block (B_{x+1}). In the next scenario, RTRRM can be transmitted in the uplink in the first burst of a block (B_{x+1}) (as indicated at 906). RTRRM can also be transmitted in the second and third bursts of block B_{x+1} (as indicated by 908 and 910, respectively).

With RTRRM transmitted in the uplink path at 904 (the last burst of block B_x), the responsive RTUAM message is communicated in the first burst of the next block B_{x+1} (as indicated by 912). However, for transmissions of RTRRM in the first, second and third bursts of block B_{x+1} (906, 908, and 910, respectively), the RTUAM is communicated in the last burst of block B_{x+1} (as indicated by 914) so that the base station has at least two or more bursts to detect the presence/absence of RTRRM on the uplink. In response to communication of RTUAM at 912 or 914, uplink traffic transmission from the first mobile station can resume in the first burst of the next block (B_{x+2}), as indicated by 916.

For improved reliability in detection of RTRRM, repetition diversity may be used, in which RTRRM is transmitted multiple times. This is possible when RTRRM is transmitted in the first or second bursts of a block (such as at 906 and 908 in Fig. 10). To enable repetition of RTRRM, RTUAM is transmitted in the last burst of the block.

Repetition diversity can also be used for RTUAM by sending it at different times. For example, if RTUAM is sent in the first burst of a block, then RTUAM may be repeated three more times. The plural RTUAM bursts are independent of each other (each is self-sufficient), and they may employ different parity protection to enhance error protection. However, if RTUAM is sent on the third or fourth burst of a block, then the base station may not be able to perform repetition diversity for RTUAM.

In accordance with some embodiments of the invention, the joint 238 detector (Figs. 4A-4B) is used to simultaneously decode both RTRRM and traffic. As noted above, RTRRM comprises the 5-bit downlink TFI coded into 148 bits. The k th sample of the complex envelope of the received signal at the output of a base station receiver filter, $r(kT)$ represented as r_k can be expressed as follows, when RTRRM is not present:

$$r_k = \sum_{i=0}^{L-1} c_i s_{k-i} + \sum_{i=0}^{N-1} e_i I_k^{(i)} + n_k \quad (\text{Eq. 1})$$

However, when RTRRM is present, r_k is expressed as follows:

$$r_k = \sum_{i=0}^{L-1} c_i s_{k-i} + \sum_{i=0}^{L-1} d_i p_{k-i} + \sum_{i=0}^{N-1} e_i I_k^{(i)} + n_k \quad (\text{Eq. 2})$$

In Eqs. 1 and 2 above, the value s_k is the k th sample of the information signal from the mobile station B. The value p_k is the k th sample of the RTRRM signal from the mobile station A, and n_k is the k th sample of the receiver noise. Also, $I_k^{(i)}$ represents the k th sample of the i th interferer, $\{c_i\}$ and $\{d_i\}$ represent the channel impulse responses associated with mobile stations A and B, respectively. L is the length (in symbols) of the channel impulse response, and N represents the number of cochannel interferers. $\{e_i\}$ is the channel weight associated with the i th interferer. Here, it is assumed that the interferer is passed through a flat fading channel.

In a given maximum likelihood sequence estimator (MLSE), the j th branch metric, $\gamma_k^{(j)}$, at time instant k , is calculated in the absence of RTRRM as follows:

$$\gamma_k^{(j)} = \left| r_k - \sum_{i=0}^{L-1} \hat{c}_i F(I^{(i \rightarrow j)}) \right|^2 \quad (\text{Eq. 3})$$

where $F(I^{(i \rightarrow j)})$ represents the symbol vector of traffic from mobile station A resulting from the transition from the i th state at time $(k-1)$ to the j th state at time k . $\{\hat{c}_i\}$ represents the estimated channel impulse response.

The branch metric is modified to jointly decode the RTRRM and data from mobile station B as follows:

$$\gamma_k^{(j,m)} = \left| r_k - \sum_{i=0}^{L-1} \hat{c}_i F(I^{(i \rightarrow j)}) - \sum_{i=0}^{L-1} \hat{d}_i F(\text{Code} - m) \right|^2 \quad (\text{Eq. 4})$$

where the third term on the right-hand side of Eq. 4 corresponds to RTRRM and has two possible states ($m=0$ or 1) corresponding to each of the two code waveforms (code-0 and code-1). Additionally, operations performed in decoding RTRRM include channel estimation during training sequence, $\{\hat{d}_i\}$, calculation of the branch metric corresponding to RTRRM for each of the two code waveforms ($m=0$ and 1), and determination of the downlink TFI of the MS TBF.

In one arrangement, the third term on the right-hand side of Eq. 4 can be calculated on a continuous basis to check for the presence of RTRRM. However, in another arrangement, the third term of the right-hand side of Eq. 4 does not need to be continuously calculated to reduce processing load. In this other arrangement, the third term on the right-hand side of Eq. 4 is calculated only when it has been determined that RTRRM is present. One example of the detector 238 configured according to the latter arrangement is illustrated in Fig. 11. Received signal samples are inputted to a receive filter 1002. The output of the receiver filter 1002 is provided to a demodulator 1006 and an RTRRM switch control module 1004. The RTRRM switch control module 1004 detects for the presence or absence of RTRRM in the received signal. When the switch control module 1004 detects the presence of RTRRM, it activates an RTRRM switch 1008, so that the metric for RTRRM (1010) can be provided to the demodulator 1006 to decode for RTRRM. Thus, in the example of Fig. 11, if the received signal does not contain RTRRM, the demodulator 1006 decodes the received signal into data (associated with mobile station B). However, if the received signal contains RTRRM, then the demodulator 1006 decodes RTRRM for use in the base station.

The operations, tasks, and functions discussed herein that are performed in stations or systems in the mobile communications network 10 may be controlled by software applications, routines, or modules executable on control units, such as those

shown in Figs. 4A-4B. Each control unit includes a microprocessor, microcontroller, processor card (including one or more microprocessors or microcontrollers), or another control or computing device. As used here, a “controller” or a “control module” refers to hardware, software, or a combination thereof. A “controller” or “control module” can
 5 refer to a single component or to multiple components (hardware or software).

The storage units referred to herein include one or more machine-readable storage media for storing data and instructions. The storage media include different forms of memory including semiconductor memory devices such as dynamic or static random access memories (DRAMs or SRAMs), erasable and programmable read-only memories (EPROMs), electrically erasable and programmable read-only memories (EEPROMs),
 10 and flash memories; magnetic disks such as fixed, floppy and removable disks; other magnetic media including tape; and optical media such as compact disks (CDs) or digital video disks (DVDs). Instructions that make up the various software routines or modules in a station or system and stored in a respective storage unit when executed by a control unit cause the corresponding station or system to perform programmed acts.
 15

The instructions of the software routines or modules are loaded or transported into the station or system in one of many different ways. For example, code segments including instructions stored on floppy disks, CD or DVD media, a hard disk, or transported through a network interface card, modem, or other interface device are loaded
 20 into the station or system and executed as corresponding software routines or modules. In the loading or transport process, data signals that are embodied in carrier waves (transmitted over telephone lines, network lines, wireless links, cables, and the like) communicate the code segments, including instructions, to the station or system. Such carrier waves are in the form of electrical, optical, acoustical, electromagnetic, or other
 25 types of signals.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover such modifications and variations as fall within the true spirit and scope of the invention.

What is claimed is:

- 1 1. A method of communicating in a mobile communications system,
2 comprising:
3 detecting that a first mobile station has stopped transmitting traffic
4 containing real-time, interactive data on a first channel portion; and
5 multiplexing traffic from a second mobile station on the first channel
6 portion during a period in which the first mobile station is not transmitting traffic.
- 1 2. The method of claim 1, further comprising receiving an indication that the
2 first mobile station is starting to transmit traffic.
- 1 3. The method of claim 2, further comprising allocating the first channel
2 portion back to the first mobile station.
- 1 4. The method of claim 1, wherein detecting that the first mobile station has
2 stopped transmitting traffic comprises detecting that the first mobile station has entered a
3 discontinuous transmission mode.
- 1 5. The method of claim 4, wherein detecting that the first mobile station has
2 entered discontinuous transmission mode comprises receiving a predetermined message
3 indicating that the mobile station is entering the discontinuous transmission mode.
- 1 6. The method of claim 1, wherein multiplexing the second mobile station
2 traffic comprises receiving the second mobile station traffic on a predetermined time slot
3 of a frame, the channel portion comprising the predetermined time slot.
- 1 7. The method of claim 1, further comprising receiving a request from the
2 first mobile station for the channel portion, the request indicating that the first mobile
3 station is about to start transmitting traffic.

1 8. The method of claim 7, wherein receiving the request comprises receiving
2 a request that is one burst in length.

1 9. The method of claim 8, wherein receiving the request comprises receiving
2 a request that coincides with traffic from the second mobile station.

1 10. The method of claim 9, further comprising extracting the request from a
2 combined signal including the request and the traffic from the second mobile station.

1 11. The method of claim 8, wherein receiving the request comprises receiving
2 a request that is based on an identifier associated with the mobile station.

1 12. The method of claim 11, wherein the identifier comprises a temporary
2 flow identifier.

1 13. The method of claim 11, wherein receiving the request comprises
2 receiving a request that contains a coded version of the identifier, the coded version
3 having a length that is longer than the identifier.

1 14. The method of claim 7, wherein receiving the request comprises receiving
2 the request during a period in which the second mobile station is transmitting traffic in
3 the first channel portion.

1 15. The method of claim 7, further comprising sending an assignment
2 message to the first mobile station.

1 16. The method of claim 15, wherein sending the assignment message
2 comprises sending a one-burst assignment message.

1 17. The method of claim 15, wherein sending the assignment message
2 comprises sending a plural-burst assignment message.

1 18. The method of claim 1, wherein detecting that the first mobile station has
2 stopped transmitting traffic comprises receiving a General Packet Radio Service
3 SID_FIRST indication.

1 19. The method of claim 18, further comprising receiving a Real-Time Fast
2 Associated Control Channel resource request message from the first mobile station for re-
3 assignment of the channel portion.

1 20. The method of claim 19, further comprising sending a Real-Time Fast
2 Associated Control Channel assignment message to the first mobile station to assign the
3 channel portion back to the first mobile station.

1 21. A system for use in a mobile communications system, comprising:
2 a wireless interface adapted to communicate over a wireless channel
3 portion with a first mobile station; and
4 a controller adapted to detect if the first mobile station has entered into a
5 discontinuous transmission mode and to allocate the wireless channel to another mobile
6 station when the first mobile station is in the discontinuous transmission mode.

1 22. The system of claim 21, wherein the wireless channel portion includes a
2 time slot of a frame having plural time slots.

1 23. The system of claim 21, further comprising a multiplexer to receive traffic
2 from the first mobile station when the first mobile station is in an active mode and to
3 receive traffic from the other mobile station when the first mobile station is in the
4 discontinuous transmission mode.

1 24. The system of claim 21, wherein the controller is adapted to detect a
2 request from the first mobile station for re-allocation of the channel portion back to the
3 first mobile station.

1 25. The system of claim 24, wherein the request comprises a request carried in
2 a General Packet Radio Service Real-Time Fast Associated Control Channel.

1 26. The system of claim 25, wherein the request comprises a Real-Time Fast
2 Associated Control Channel resource request message.

1 27. The system of claim 24, wherein the controller is adapted to further send
2 an assignment message to the first mobile station in response to the request.

1 28. The system of claim 24, wherein the request has a length of one time slot
2 of a frame.

1 29. The system of claim 28, wherein the request is based on an identifier
2 associated with the first mobile station.

1 30. The system of claim 29, wherein the request is a coded version of the
2 identifier associated with the first mobile station.

1 31. The system of claim 24, wherein the request coincides with traffic from
2 the other mobile station, the system further comprising a joint detector to extract the
3 request from a combined message including the request and the traffic from the other
4 mobile station.

1 32. The system of claim 24, wherein the controller is adapted to receive the
2 request during at the same time the controller is receiving traffic from the other mobile
3 station.

1 33. A mobile station comprising:
2 a detector to detect when the mobile station is entering discontinuous
3 transmission mode;
4 a controller adapted to send an indication to a base station of the
5 discontinuous transmission mode to indicate that a channel portion assigned to the mobile
6 station is idle,
7 the controller adapted to further send a request for re-assignment of the
8 channel portion when the mobile station exits discontinuous mode.

1 34. The mobile station of claim 33, wherein the controller is adapted to send
2 the indication according to a General Packet Radio Service protocol.

1 35. The mobile station of claim 34, wherein the mobile station is associated
2 with temporary flow identifier, the request being based on the temporary flow identifier.

1 36. The mobile station of claim 35, further comprising a storage unit to store
2 the temporary flow identifier, the mobile station keeping the temporary flow identifier
3 during discontinuous transmission mode.

1 37. The mobile station of claim 33, wherein the controller is adapted to further
2 receive an assignment message responsive to the request and to transmit traffic on the
3 channel portion after receiving the assignment message.

1 38. The mobile station of claim 33, wherein the channel portion comprises a
2 time slot of a frame.

1 39. A system for use in a mobile communications system, comprising:
2 a wireless interface adapted to communicate over a wireless channel
3 portion with one of a first mobile station and a second mobile station; and
4 a controller adapted to allocate the channel portion to the second mobile
5 station when the first mobile station is silent and to receive a request from the first mobile

6 station for allocation of the channel portion while concurrently receiving traffic from the
7 second mobile station.

1 40. The system of claim 39, wherein the channel portion comprises a time slot
2 of a frame having plural time slots.

1 41. The system of claim 39, wherein the request comprises a General Packet
2 Radio Service Real-Time Fast Associated Control Channel message.

1 44. An article comprising at least one storage medium containing instructions
2 for communicating in a mobile communications network, the instructions when executed
3 causing a system to:

4 detect a first mobile station entering discontinuous transmission mode, the
5 first mobile station assigned a channel portion to communicate traffic; and

6 multiplex traffic from a second mobile station onto the channel portion
7 during a time period in which the first mobile station is in discontinuous transmission
8 mode.

1 45. The article of claim 44, wherein the instructions when executed cause the
2 system to further receive a request from the first mobile station for a re-allocation of the
3 channel portion.

1 46. The article of claim 45, wherein the channel portion comprises a time slot
2 of a frame having plural time slots.

1 47. The article of claim 45, wherein the instructions when executed cause the
2 system to receive the request from the first mobile station that overlaps traffic from the
3 second mobile station.

1 48. A data signal embodied in a carrier wave and comprising instructions for
2 communicating in a mobile communications network, the instructions when executed
3 causing a system to:

4 receive an indication that a first mobile station is entering discontinuous
5 transmission mode;

6 allocate a channel portion assigned to the first mobile station to a second
7 mobile station;

8 receive traffic from the second mobile station during a time period in
9 which the first mobile station is in discontinuous transmission mode.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197

ABSTRACT OF THE DISCLOSURE

A mobile communications system includes a radio access network, such as an Enhanced General Packet Radio Service (EGPRS) network, in which mobile stations are able to enter into a discontinuous transmission (DTX) mode. During DTX mode of a first mobile station that is allocated a channel portion (e.g., a time slot of a frame), the radio access network is able to multiplex traffic from another mobile station onto the same channel portion. A mechanism is provided to enable the first mobile station to send a request for re-allocation of the channel portion. The request includes a Real-Time FastAssociated Control Channel (RTFACCH) resource request message (RTRRM). In response to the RTRRM, the radio access network sends an RTFACCH resource assignment message (RTUAM).

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205

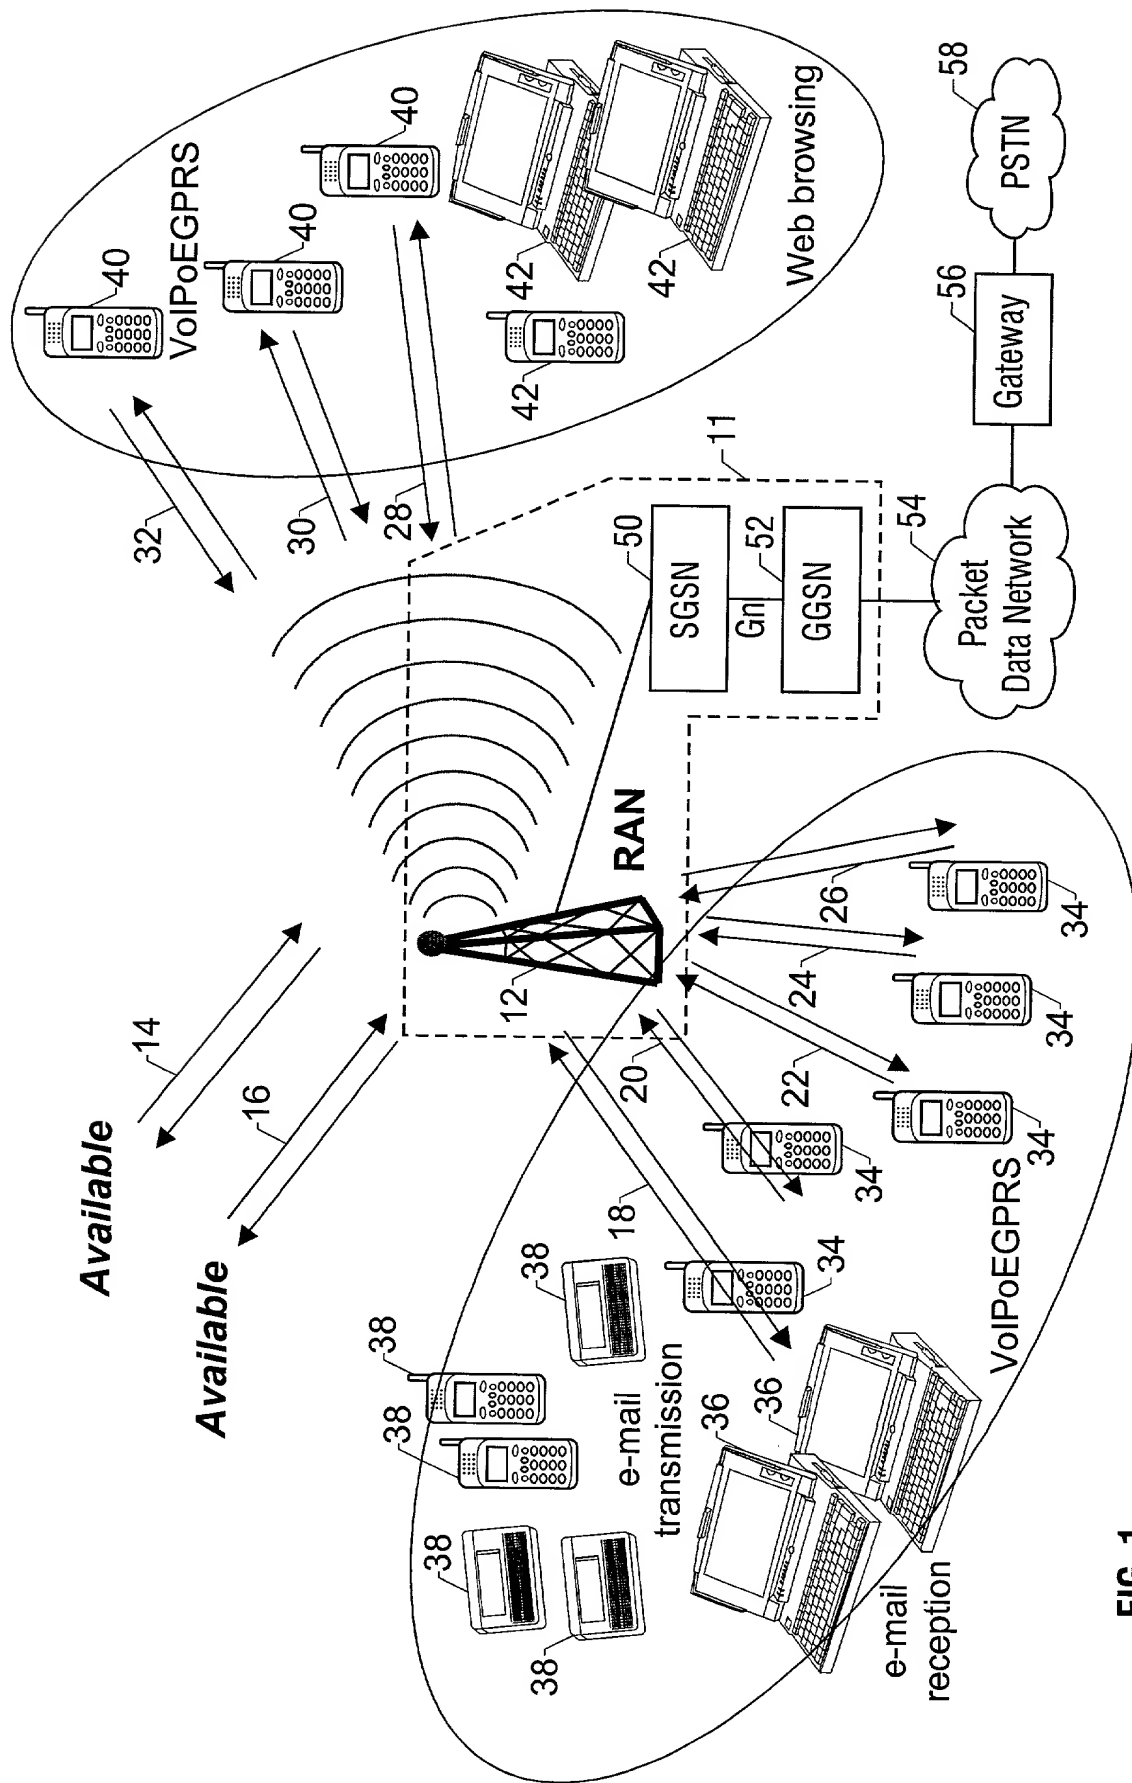


FIG. 1

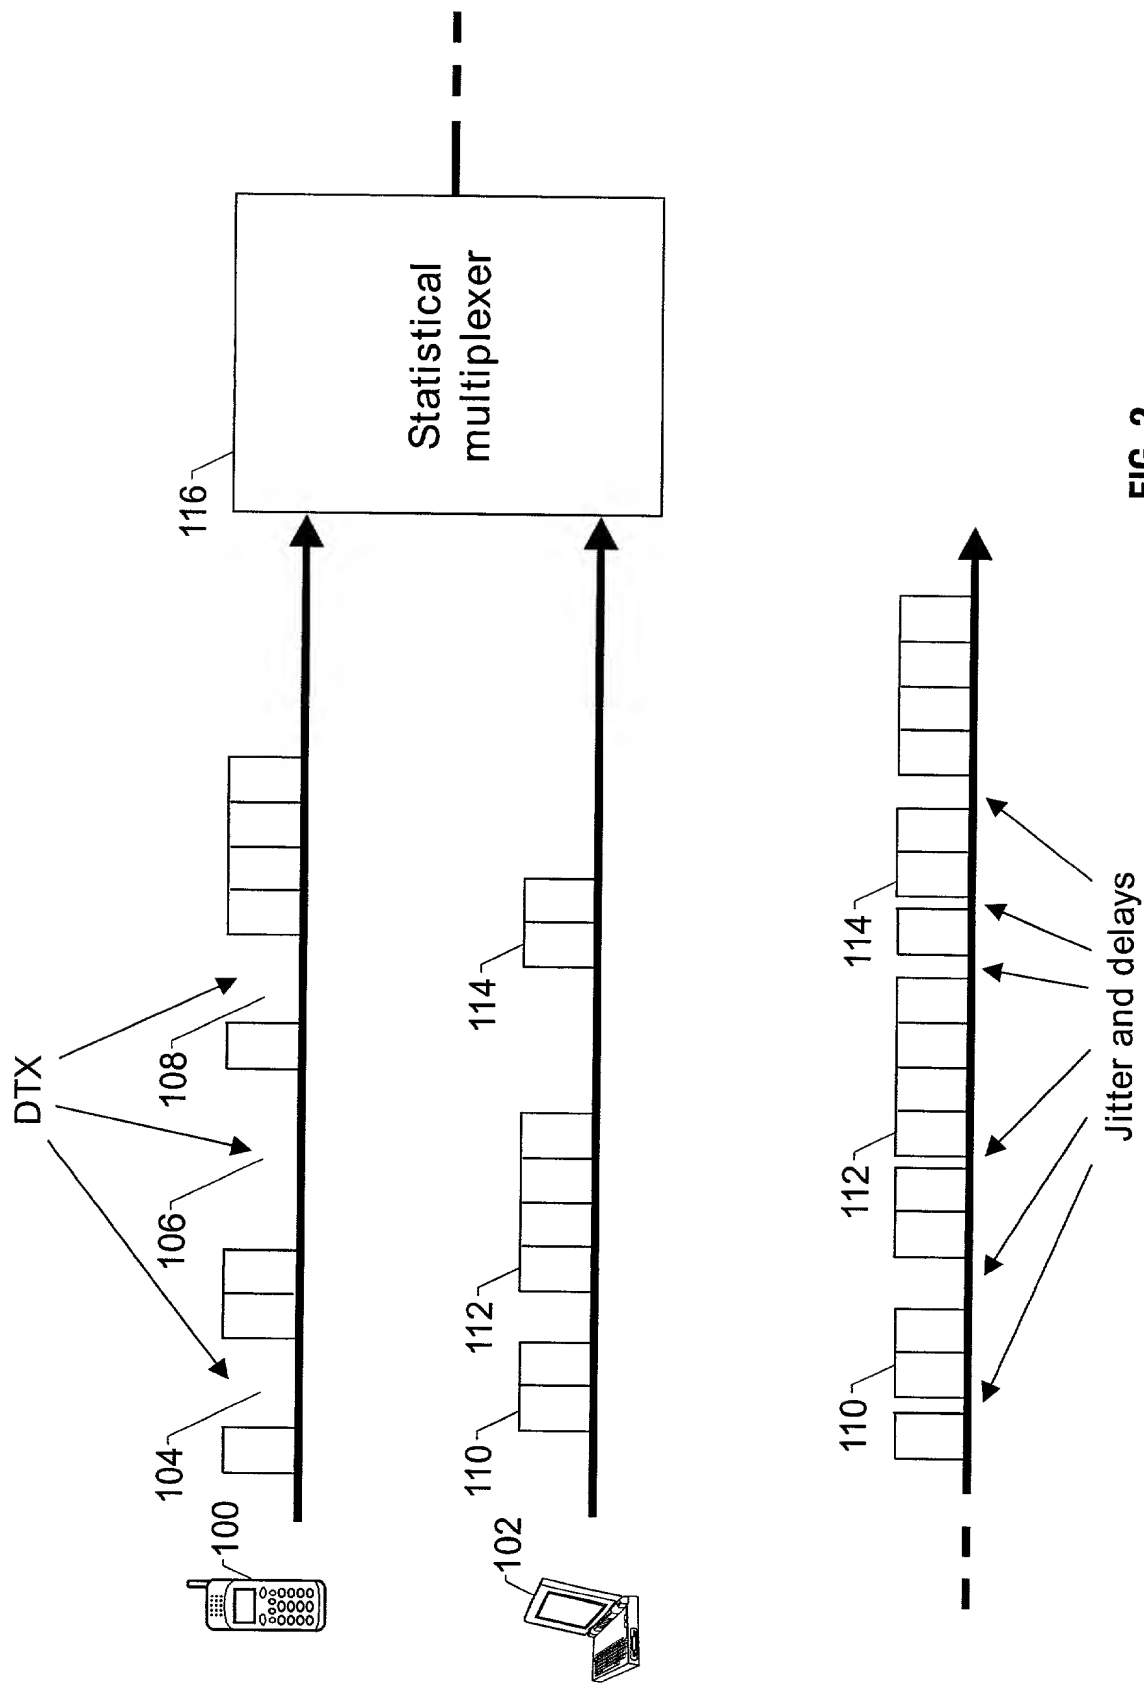


FIG. 2

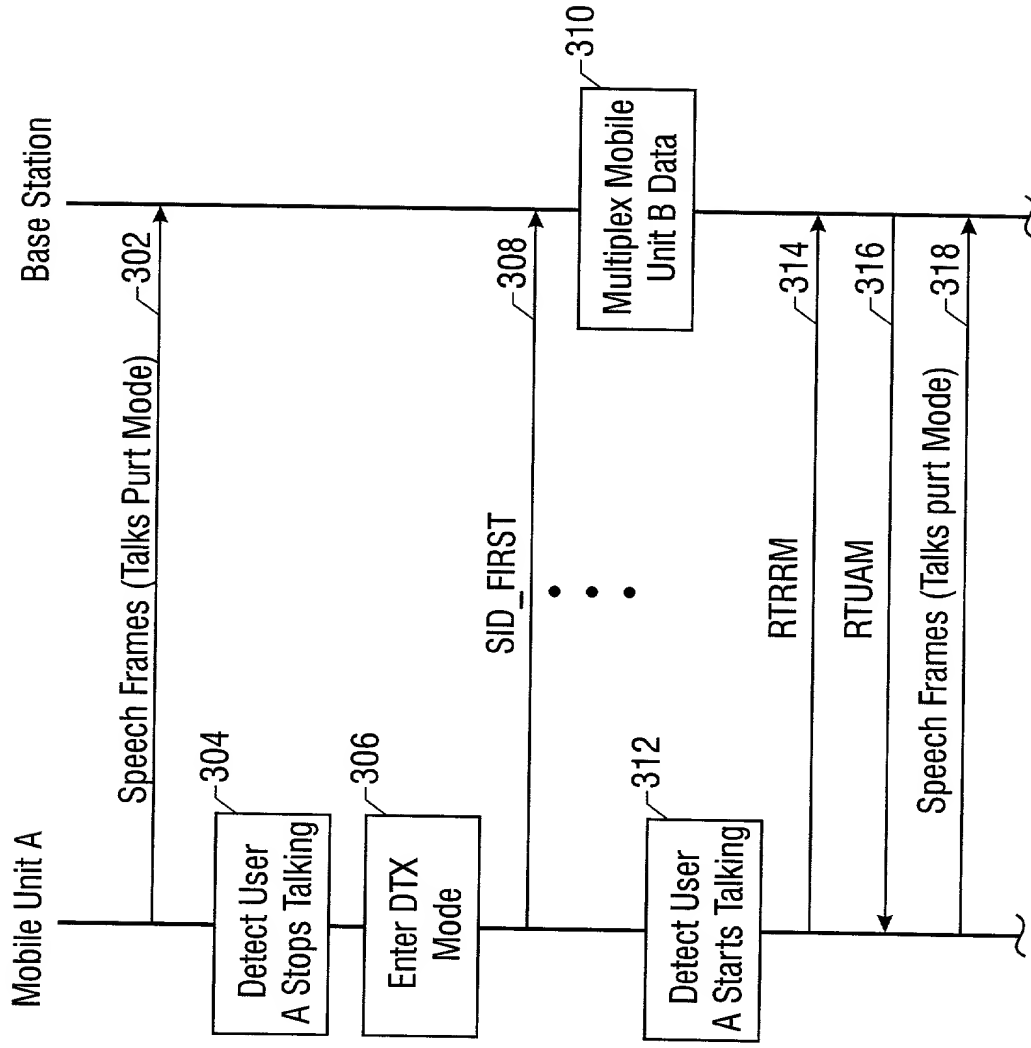


FIG. 3

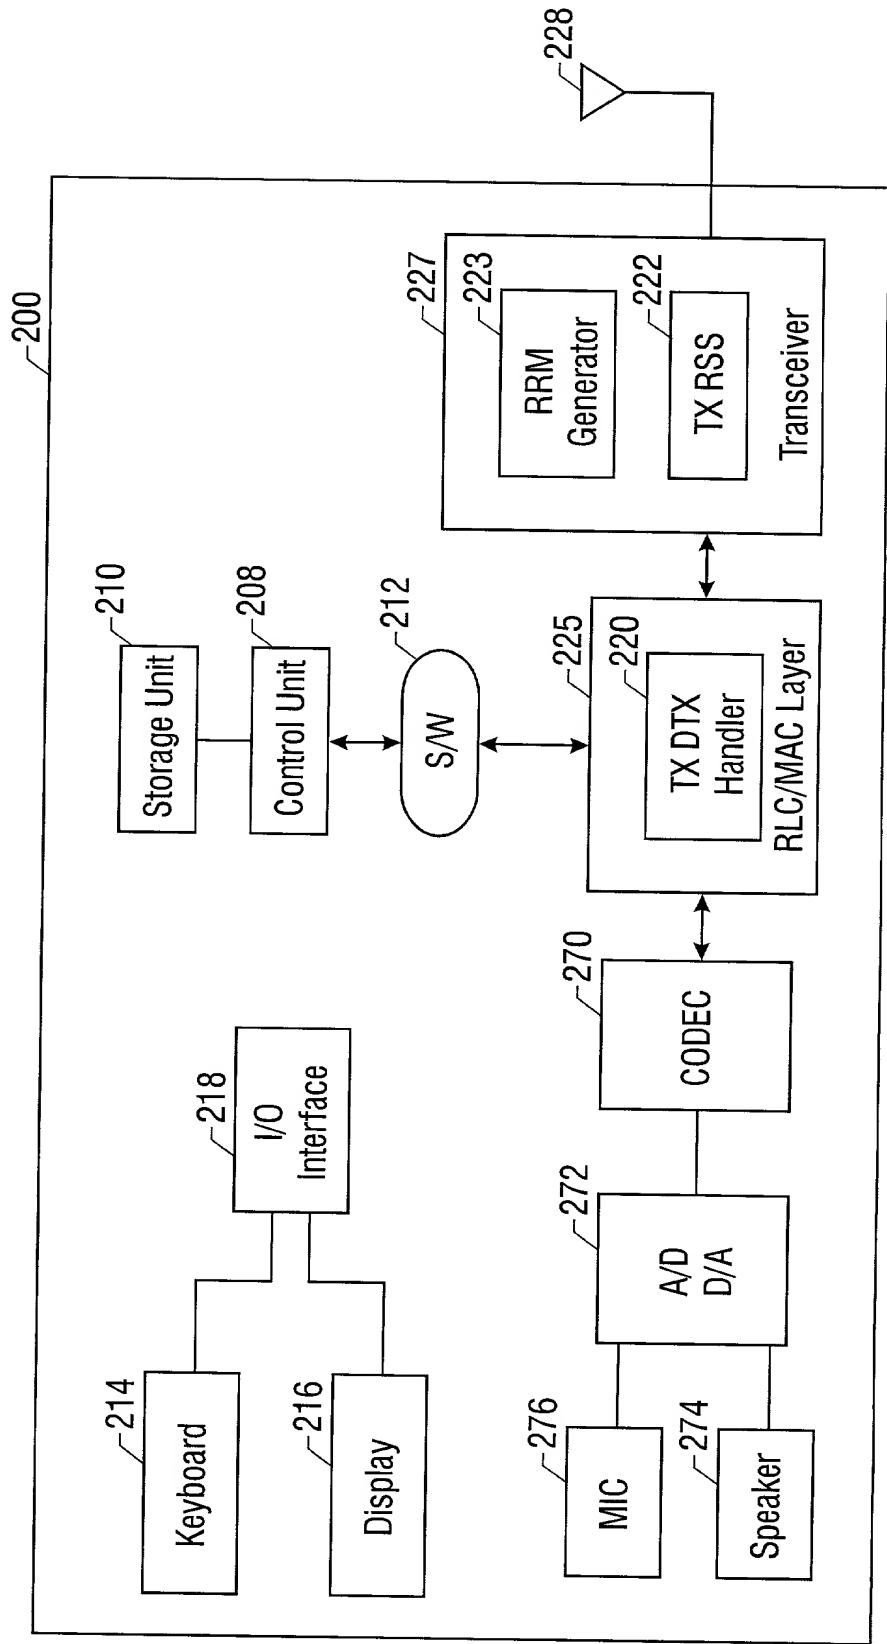


FIG. 4A

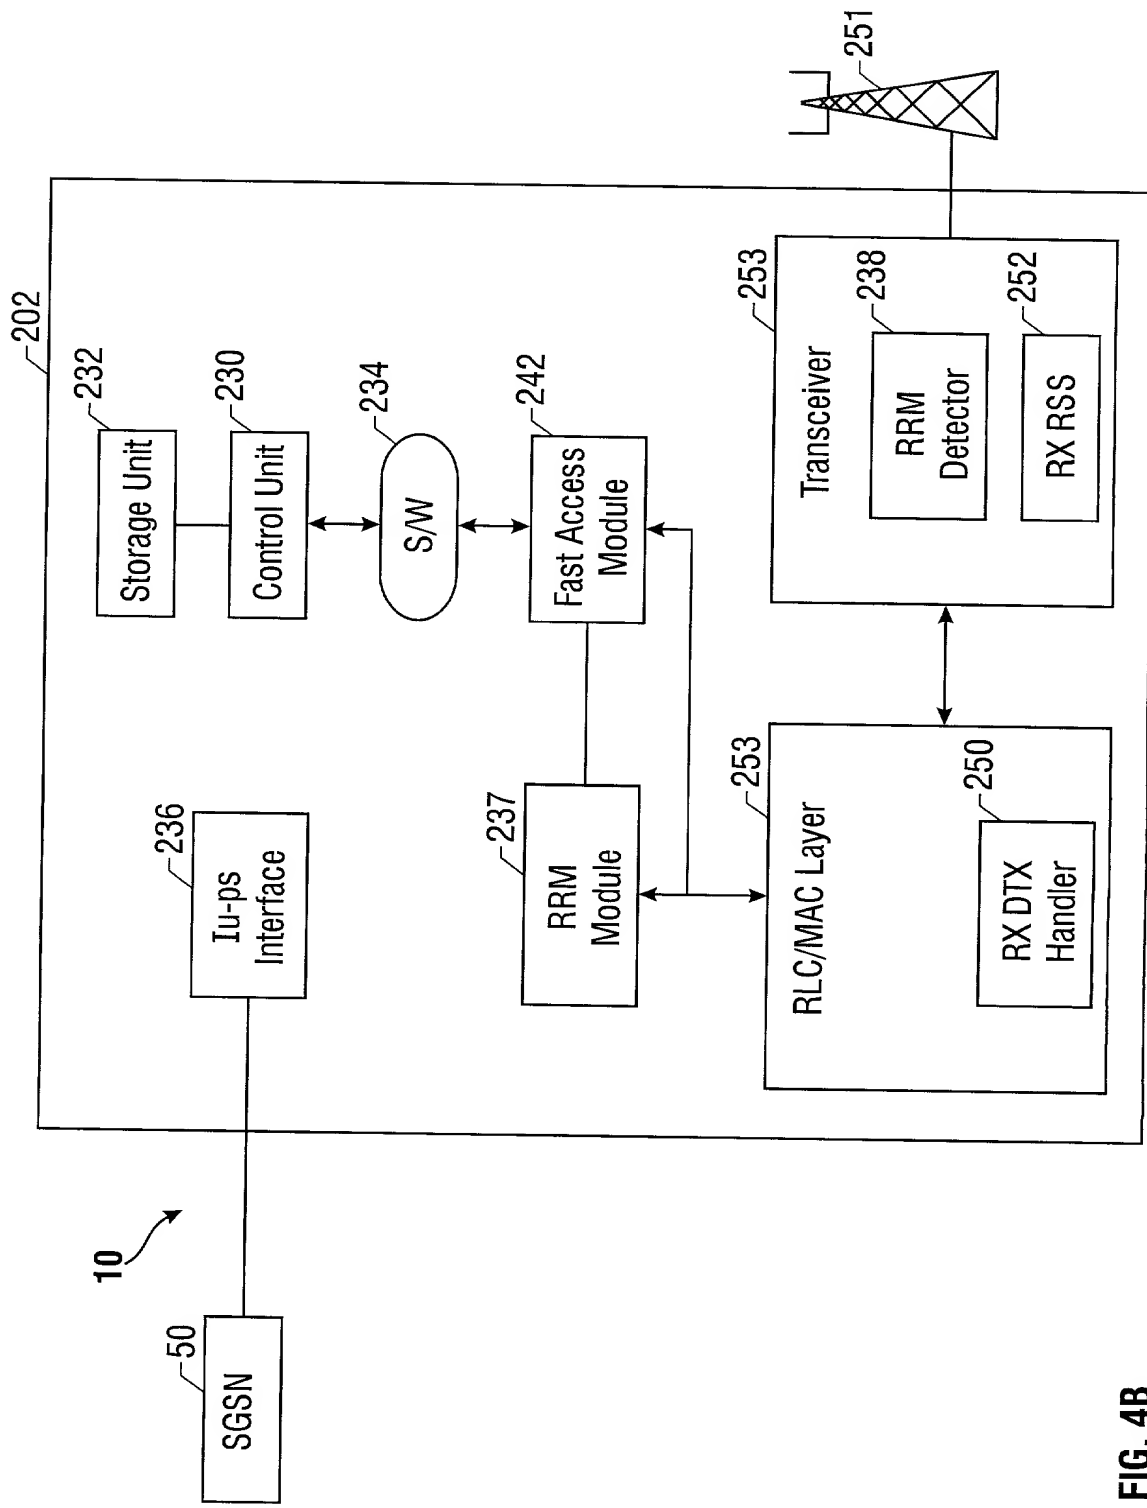


FIG. 4B

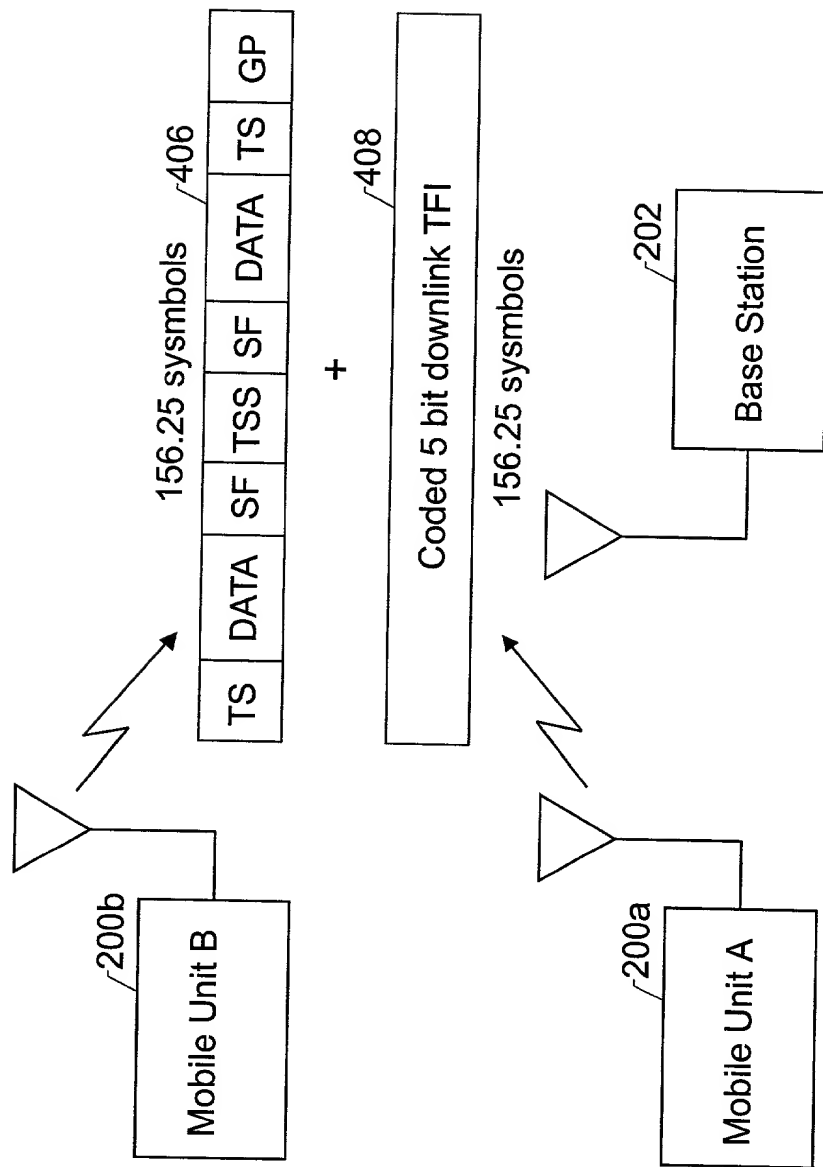


FIG. 5

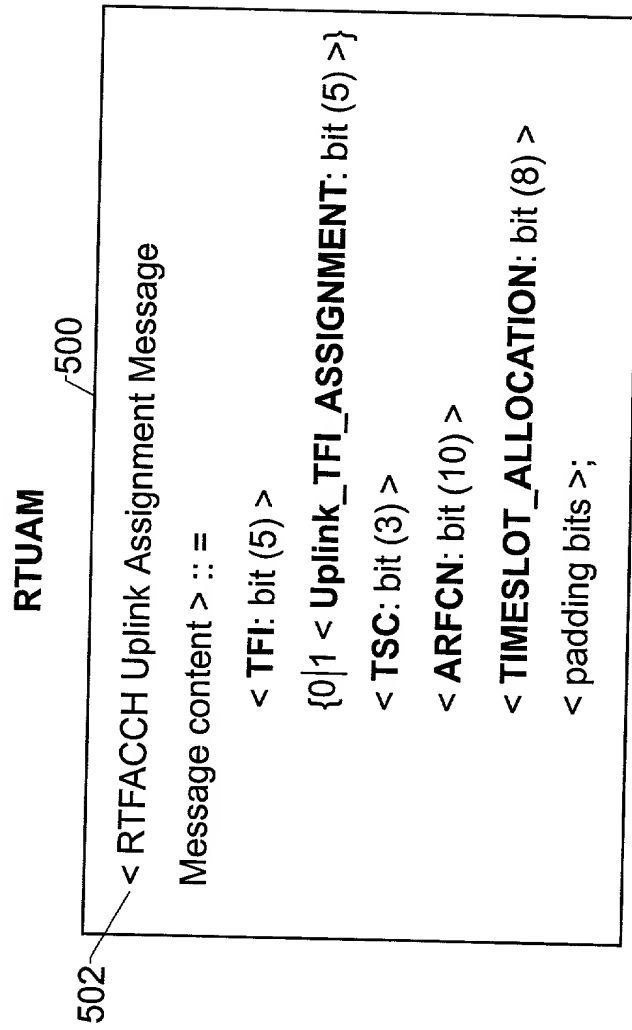


FIG. 6

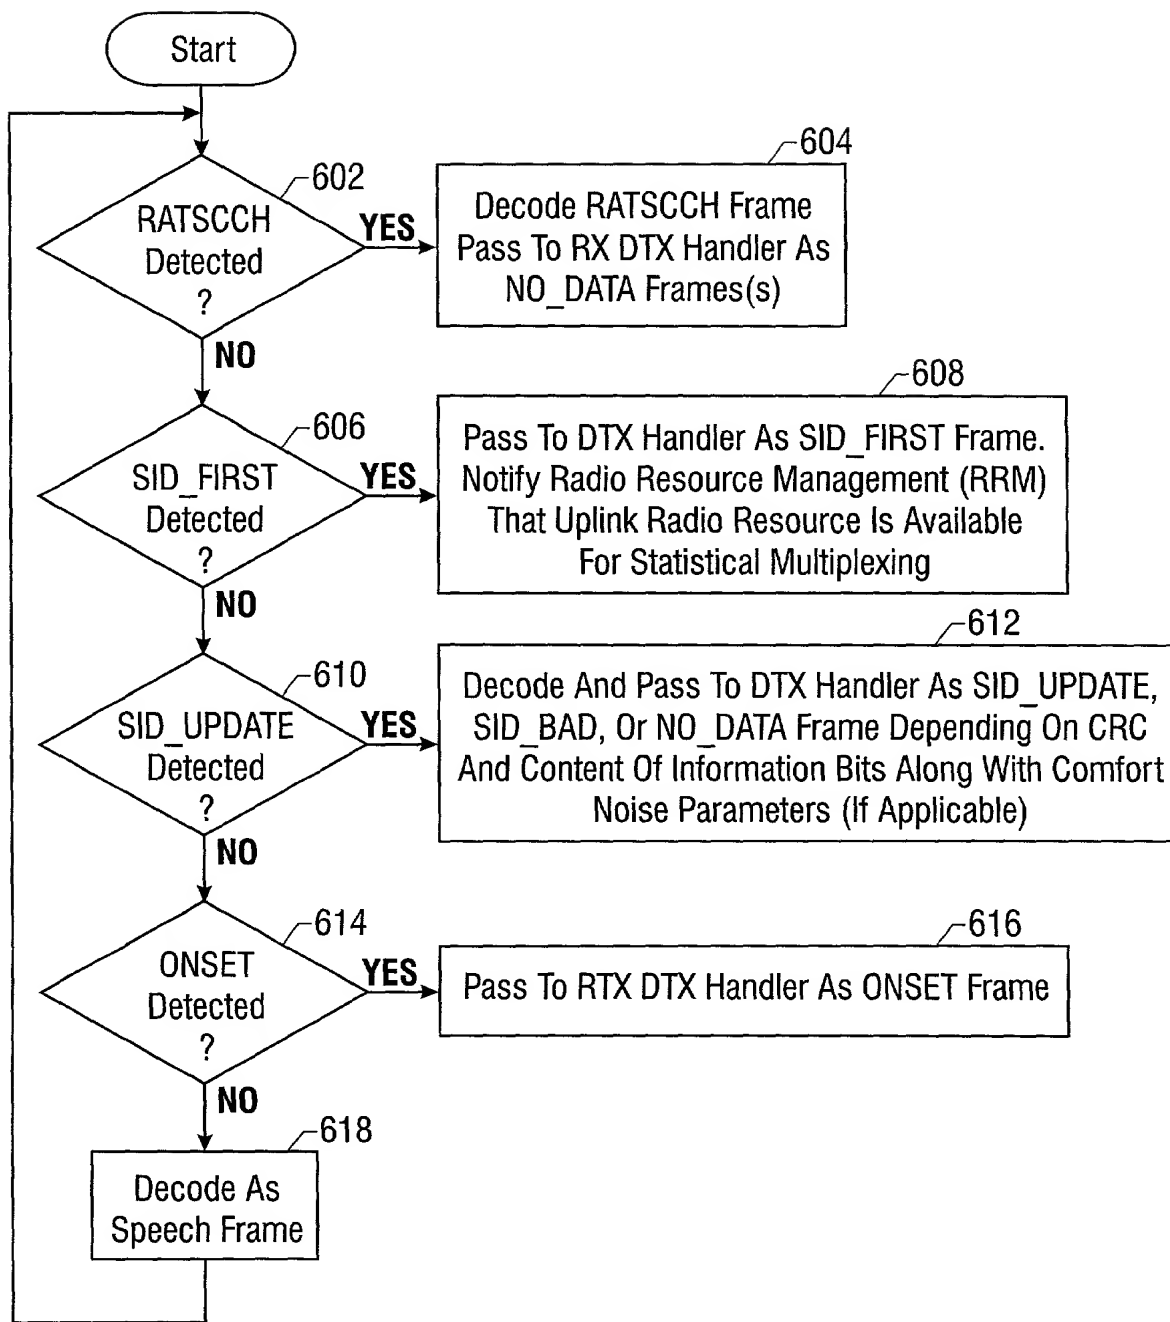


FIG. 7


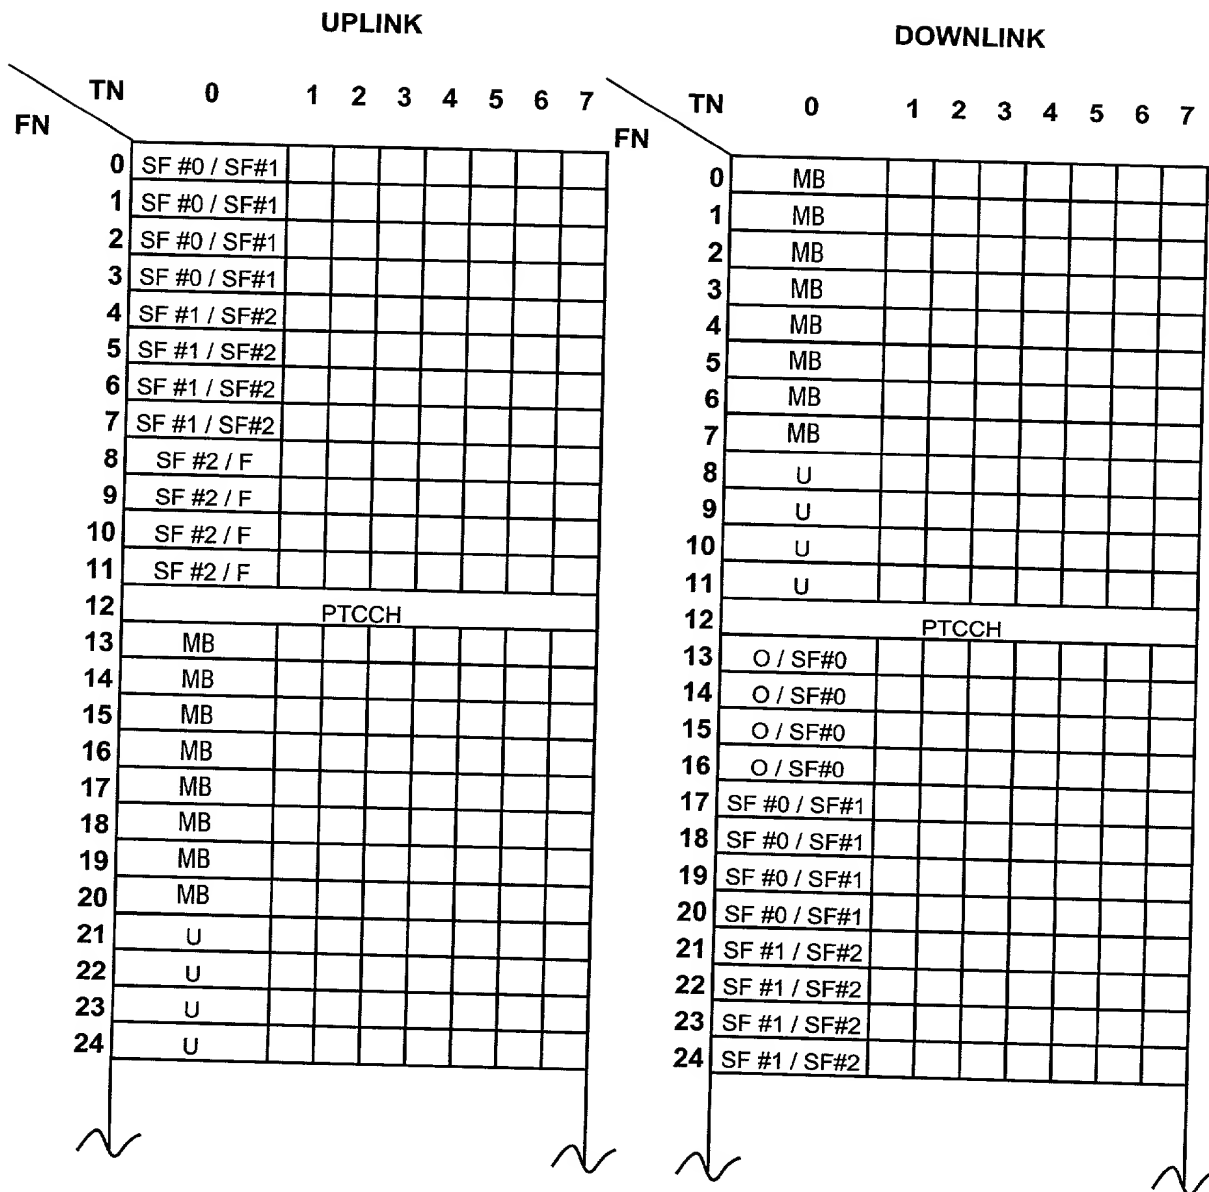


FIG. 8A

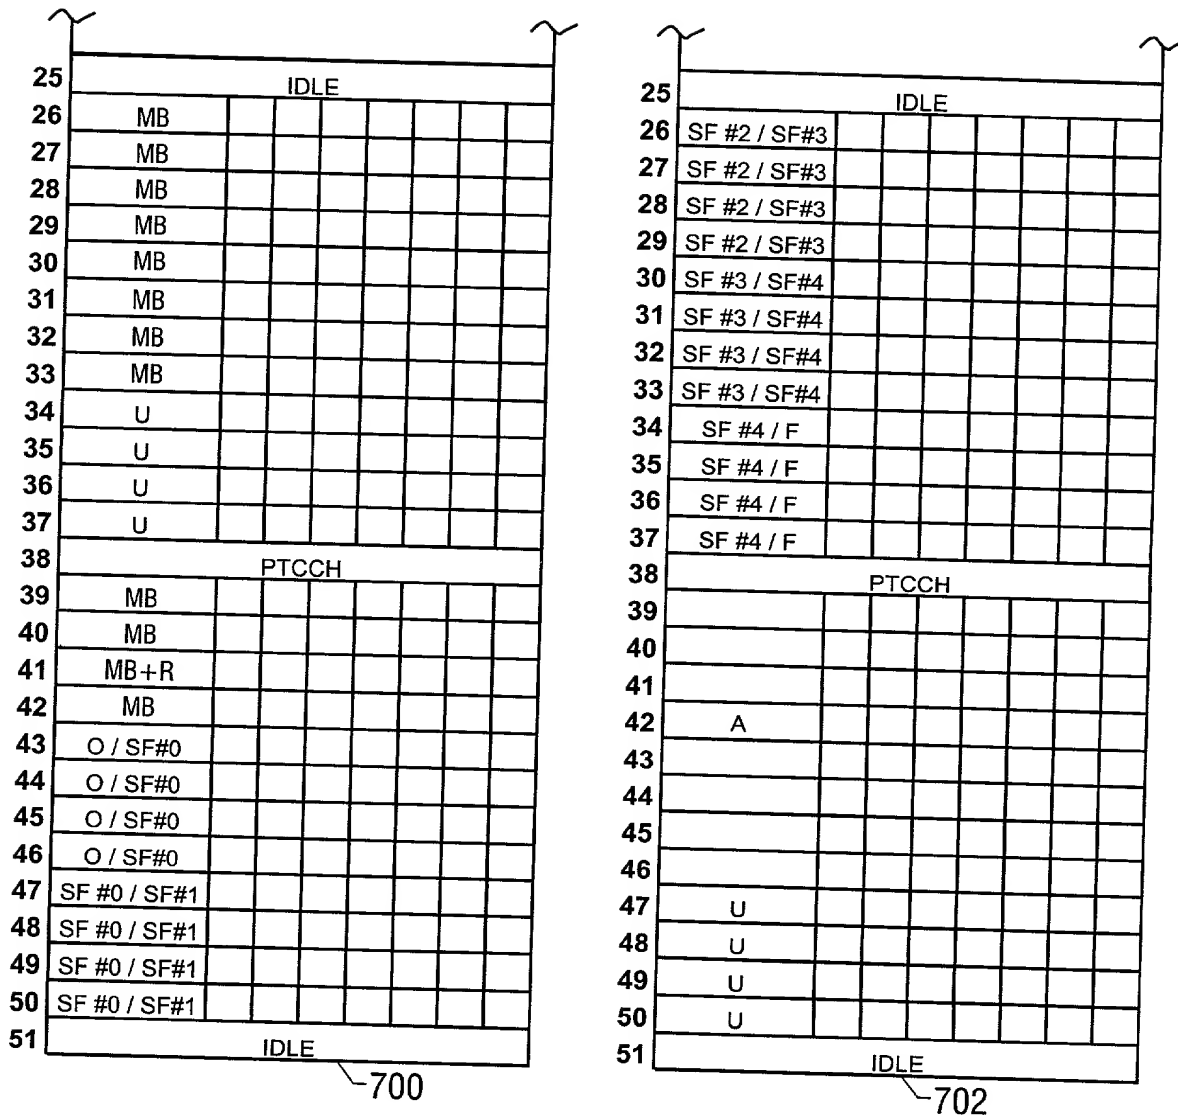

Minimum
Delay

FIG. 8B


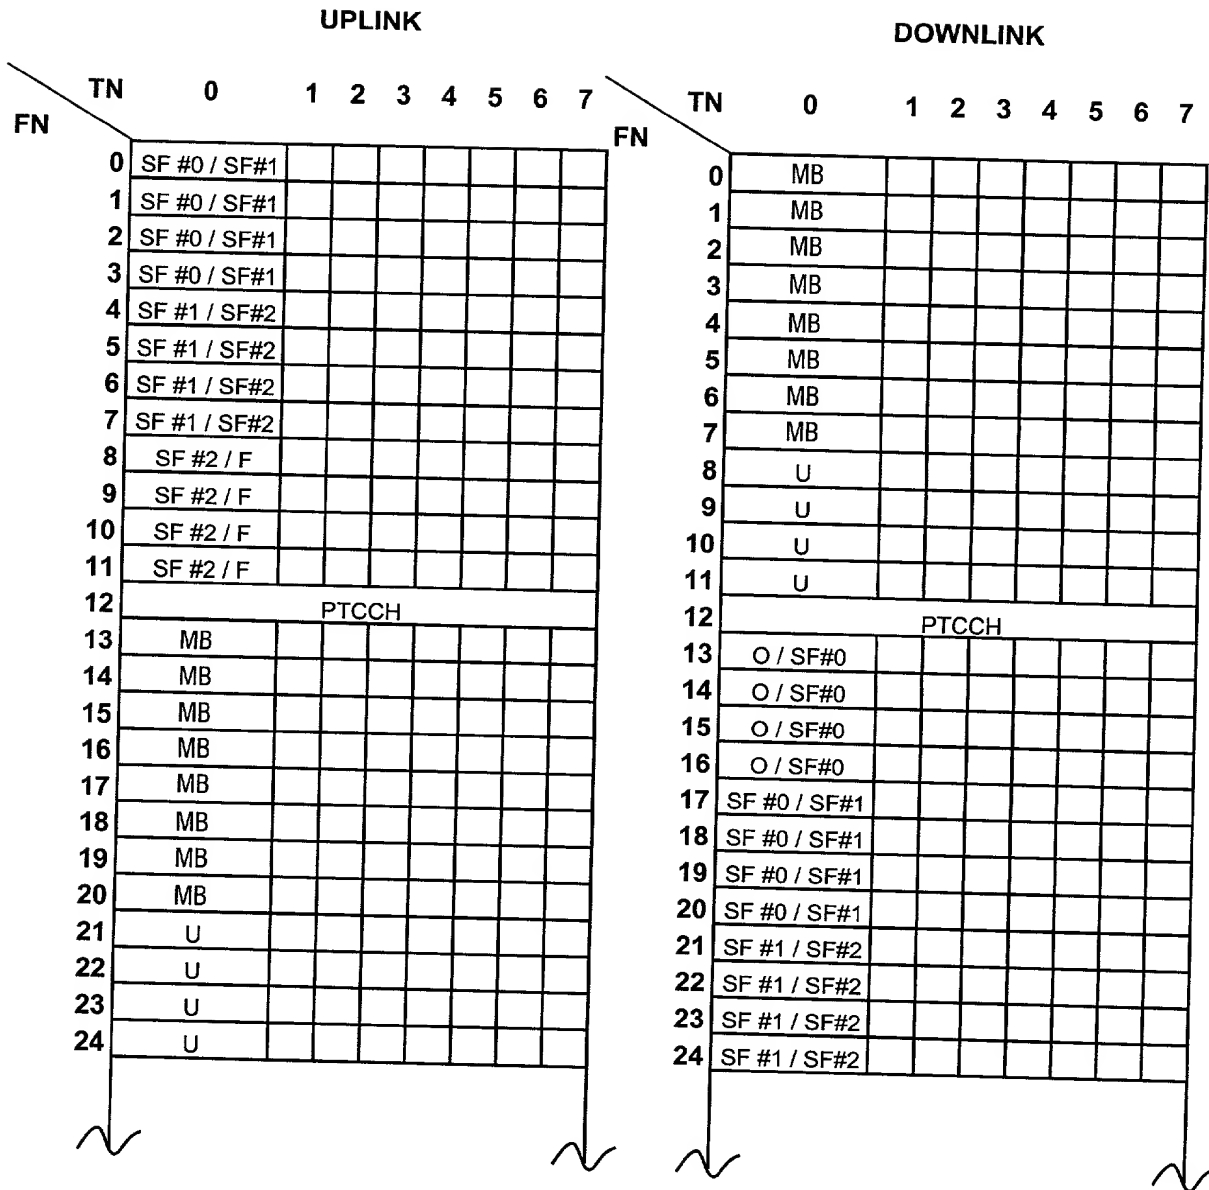


FIG. 9A

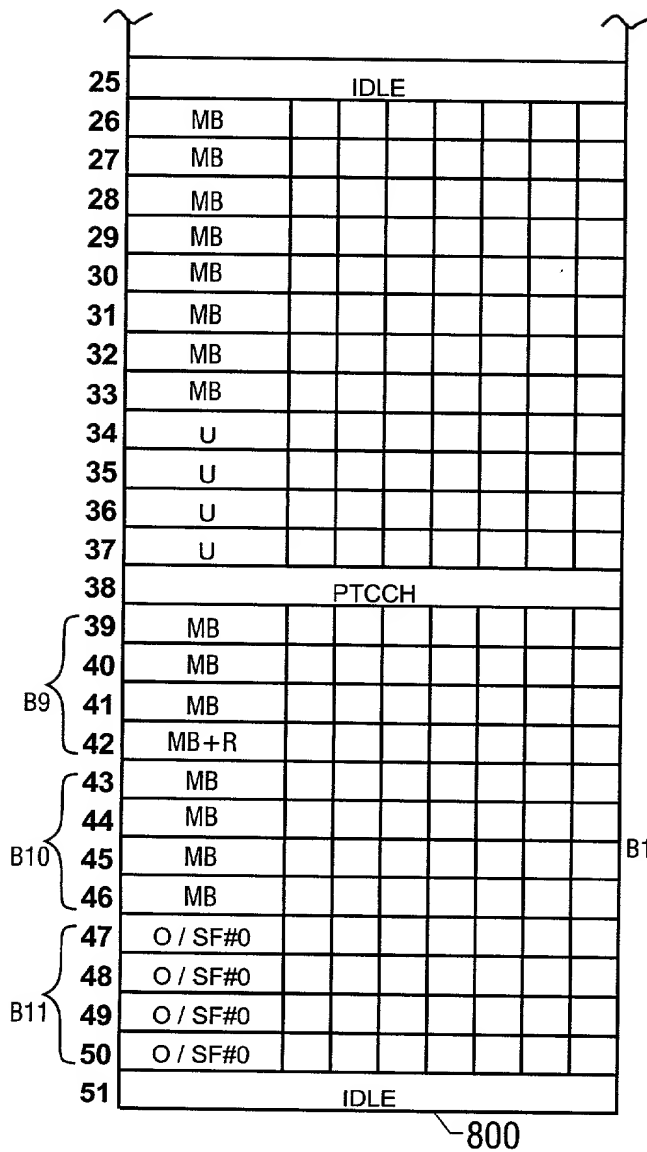

Maximum
Delay

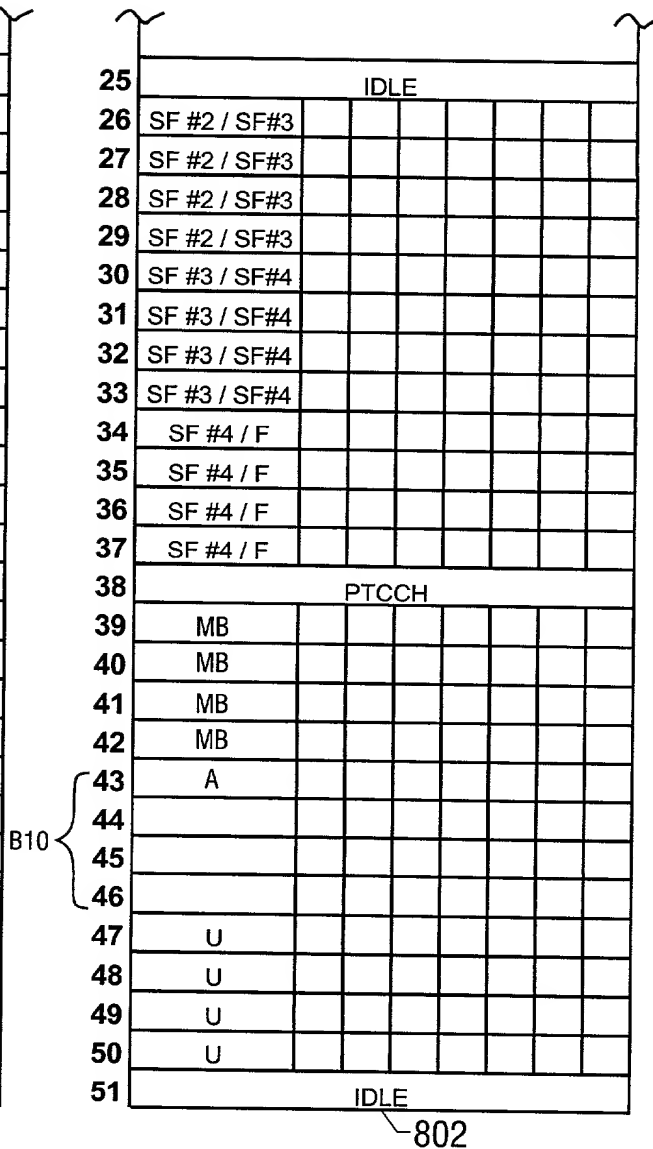


FIG. 9B

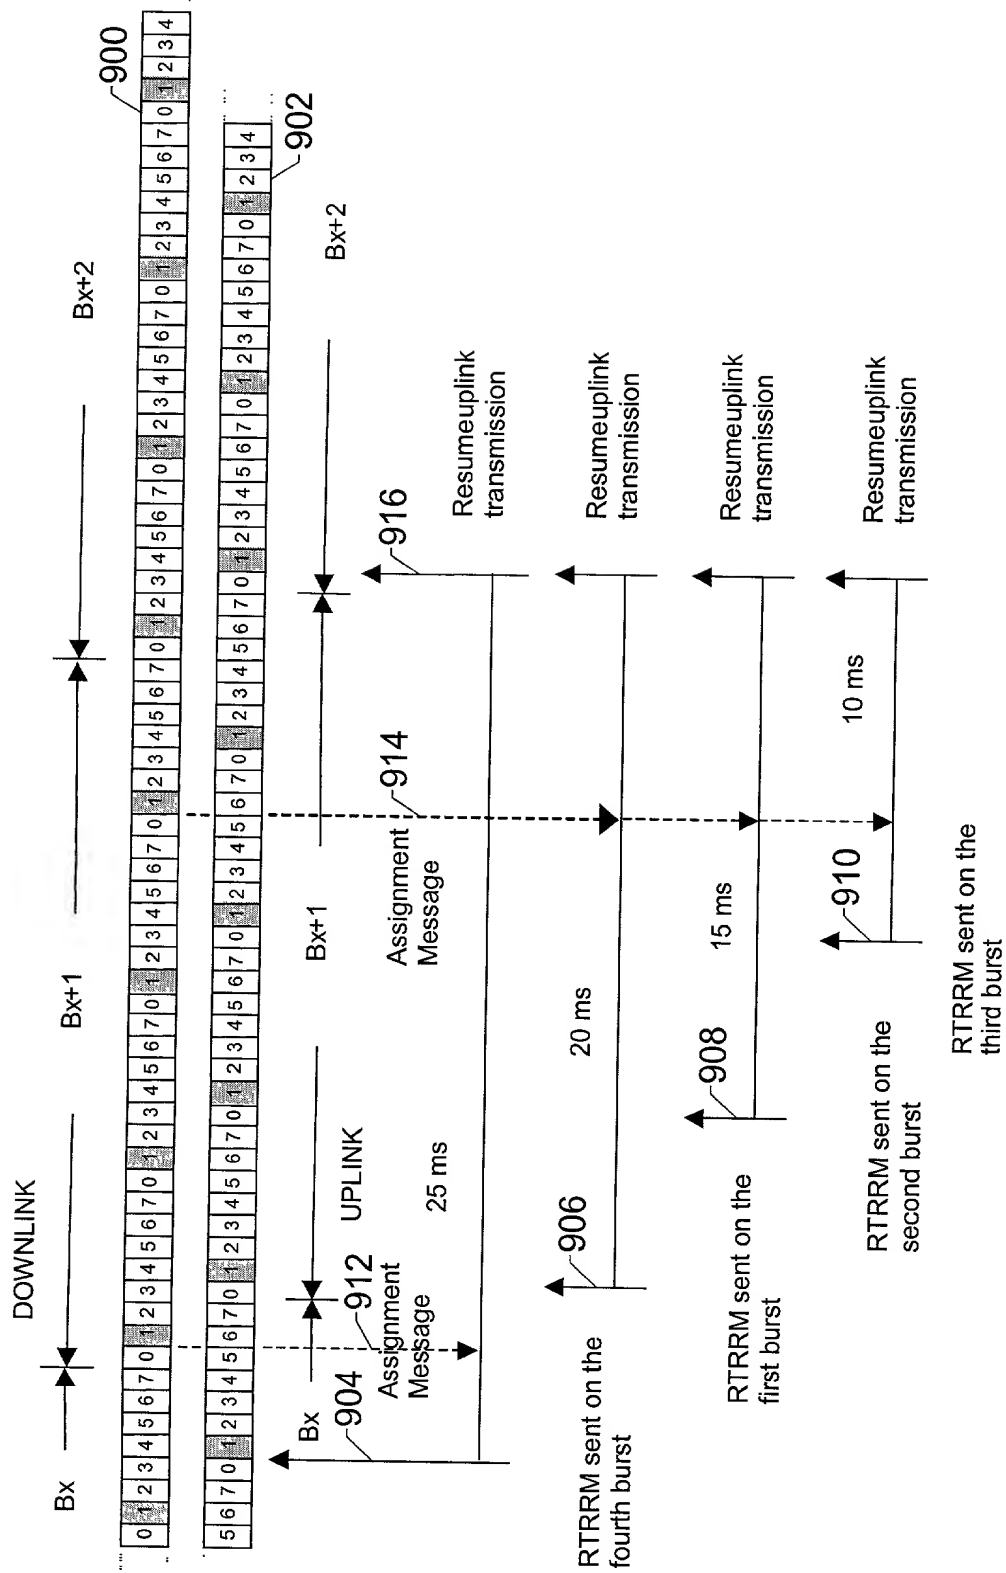


FIG. 10

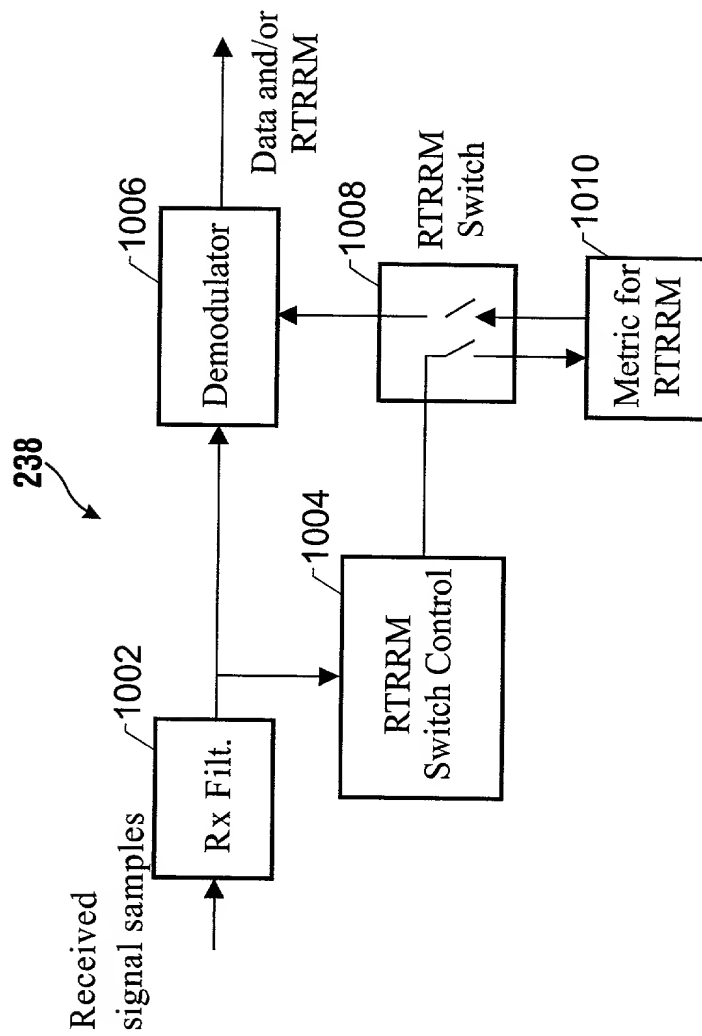


FIG. 11

Attorney's Docket No.: NORT-0070-US (12011RRUS02U)PATENT**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**COMMUNICATING TRAFFIC OVER A WIRELESS CHANNEL IN A MOBILE
COMMUNICATIONS SYSTEM**

the specification of which

X	is attached hereto.
	was filed on _____ as
	United States Application Number _____
	or PCT International Application Number _____
	and was amended on _____
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate Issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s):</u>			<u>Priority Claimed</u>	
<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

<u>60/175,329</u>	<u>01/10/2000</u>
<u>(Application Number)</u>	<u>(Filing Date)</u>
<u>(Application Number)</u>	<u>(Filing Date)</u>


I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>(Application Number)</u>	<u>Filing Date</u>	<u>(Status-patented, pending, abandoned)</u>
-----------------------------	--------------------	--

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, Reg. No. 40,025 and Ruben S. Bains, Reg. No. 46,532; my patent attorneys, of TROP, PRUNER & HU, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and John D. Crane, Reg. No. 25,231; Howard R. Greenberg, Reg. No. 26,171; W. Glen Johnson, Reg. No. 39,525; Randall Mishler, Reg. No. 42,006; Kevin L. Smith, Reg. No. 38,620; Vernon E. Williams, Reg. No. 38,713; Thomas A. Gigliotti, Reg. No. 37,579; Eric P. Jensen, Reg. No. 37,647; J. Erik Fako, Reg. No. 42,522; John H. Vynalek, Reg. No. 37,254; John R. Witcher, III, Reg. No. 39,877; and R. Todd Morgan, Reg. No. 43,815, my patent attorneys, of Nortel Networks Limited; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Dan C. Hu, TROP, PRUNER & HU, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

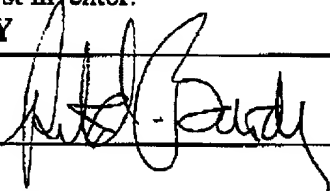Full Name of Sole/First Inventor: PETER A. BARANY	
Inventor's Signature: 	Date: 11/17/00
Residence: 830 Hills Creek Dr., McKinney, TX 75070	Citizenship: U.S.A.
Post Office Address: 830 Hills Creek Dr., McKinney, TX 75070	
Full Name of Second/Joint Inventor: CHANDRA S. BONTU	
Inventor's Signature:	Date:
Residence: 18 Deerfield Drive., #1606, Nepean, ON, CANADA K2G4L1	Citizenship: INDIA
Post Office Address: 18 Deerfield Drive., #1606, Nepean, ON, CANADA K2G4L1	
Full Name of Third/Joint Inventor: SHAMIM AKBAR RAHMAN	
Inventor's Signature:	Date:
Residence: 20 Deerfield Dr., Apt. 206, Nepean, ON, CANADA K2G4L2	Citizenship: CANADA
Post Office Address: 20 Deerfield Dr., Apt. 206, Nepean, ON, CANADA K2G4L2	

Attorney's Docket No.: NORT-0070-US (12011RRUS02U)PATENTDECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COMMUNICATING TRAFFIC OVER A WIRELESS CHANNEL IN A MOBILE COMMUNICATIONS SYSTEM

the specification of which

X	is attached hereto.
	was filed on _____ as
	United States Application Number _____
	or PCT International Application Number _____
	and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):Priority Claimed

<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

<u>60/175,329</u>	<u>01/10/2000</u>
<u>(Application Number)</u>	<u>(Filing Date)</u>
<u>(Application Number)</u>	<u>(Filing Date)</u>

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>(Application Number)</u>	<u>Filing Date</u>	<u>(Status-patented, pending, abandoned)</u>
-----------------------------	--------------------	--

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, Reg. No. 40,025 and Ruben S. Bains, Reg. No. 46,532; my patent attorneys, of TROP, PRUNER & HU, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and John D. Crane, Reg. No. 25,231; Howard R. Greenberg, Reg. No. 26,171; W. Glen Johnson, Reg. No. 39,525; Randall Mishler, Reg. No. 42,006; Kevin L. Smith, Reg. No. 38,620; Vernon E. Williams, Reg. No. 38,713; Thomas A. Gigliotti, Reg. No. 37,579; Eric P. Jensen, Reg. No. 37,647; J. Erik Fako, Reg. No. 42,522; John H. Vynalek, Reg. No. 37,254; John R. Witcher, III, Reg. No. 39,877; and R. Todd Morgan, Reg. No. 43,815, my patent attorneys, of Nortel Networks Limited; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Dan C. Hu, TROP, PRUNER & HU, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: PETER A. BARANY	
Inventor's Signature:	Date:
Residence: 830 Hills Creek Dr., McKinney, TX 75070	Citizenship: U.S.A.
Post Office Address: 830 Hills Creek Dr., McKinney, TX 75070	
Full Name of Second/Joint Inventor: CHANDRA S. BONTU	
Inventor's Signature: <i>Chandra S. Bontu</i>	Date: <i>Nov. 17, 2000</i>
Residence: 18 Deerfield Drive., #1606, Nepean, ON, CANADA K2G4L1	Citizenship: INDIA
Post Office Address: 18 Deerfield Drive., #1606, Nepean, ON, CANADA K2G4L1	
Full Name of Third/Joint Inventor: SHAMIM AKBAR RAHMAN	
Inventor's Signature:	Date:
Residence: 20 Deerfield Dr., Apt. 206, Nepean, ON, CANADA K2G4L2	Citizenship: CANADA
Post Office Address: 20 Deerfield Dr., Apt. 206, Nepean, ON, CANADA K2G4L2	

Attorney's Docket No.: NORT-0070-US (12011RRUS02U)PATENTDECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**COMMUNICATING TRAFFIC OVER A WIRELESS CHANNEL IN A MOBILE
COMMUNICATIONS SYSTEM**

the specification of which

X	is attached hereto.
	was filed on _____ as
	United States Application Number _____
	or PCT International Application Number _____
	and was amended on _____
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate Issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):Priority Claimed

<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

<u>60/175,329</u>	<u>01/10/2000</u>
<u>(Application Number)</u>	<u>(Filing Date)</u>
<u>(Application Number)</u>	<u>(Filing Date)</u>

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>(Application Number)</u>	<u>Filing Date</u>	<u>(Status-patented, pending, abandoned)</u>
-----------------------------	--------------------	--

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, Reg. No. 40,025 and Ruben S. Bains, Reg. No. 46,532; my patent attorneys, of TROP, PRUNER & HU, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and John D. Crane, Reg. No. 25,231; Howard R. Greenberg, Reg. No. 26,171; W. Glen Johnson, Reg. No. 39,525; Randall Mishler, Reg. No. 42,006; Kevin L. Smith, Reg. No. 38,620; Vernon E. Williams, Reg. No. 38,713; Thomas A. Gigliotti, Reg. No. 37,579; Eric P. Jensen, Reg. No. 37,647; J. Erik Fako, Reg. No. 42,522; John H. Vynalek, Reg. No. 37,254; John R. Witcher, III, Reg. No. 39,877; and R. Todd Morgan, Reg. No. 43,815, my patent attorneys, of Nortel Networks Limited; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Dan C. Hu, TROP, PRUNER & HU, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: PETER A. BARANY	
Inventor's Signature:	Date:
Residence: 830 Hills Creek Dr., McKinney, TX 75070	Citizenship: U.S.A.
Post Office Address: 830 Hills Creek Dr., McKinney, TX 75070	
Full Name of Second/Joint Inventor: CHANDRA S. BONTU	
Inventor's Signature:	Date:
Residence: 18 Deerfield Drive., #1606, Nepean, ON, CANADA K2G4L1	Citizenship: INDIA
Post Office Address: 18 Deerfield Drive., #1606, Nepean, ON, CANADA K2G4L1	
Full Name of Third/Joint Inventor: SHAMIM AKBAR RAHMAN	
Inventor's Signature: <i>Shamim Akbar Rahman</i>	Date: <i>Nov. 17, 2000</i>
Residence: 20 Deerfield Dr., Apt. 206, Nepean, ON, CANADA K2G4L2	Citizenship: CANADA
Post Office Address: 20 Deerfield Dr., Apt. 206, Nepean, ON, CANADA K2G4L2	